



SAMPLE PART # : SPBRP1600

**METRIC V-BELTS**

**SPB** SECTION : 16.3mm W x 13mm H

PART NO.	DATUM LENGTH (MM)	WEIGHT (LBS)
SPBRP1250	1250	2.44
SPBRP1320	1320	2.57
SPBRP1400	1400	2.73
SPBRP1500	1500	2.93
SPBRP1600	1600	3.12
SPBRP1700	1700	3.32
SPBRP1800	1800	3.51
SPBRP1900	1900	3.71
SPBRP2000	2000	3.90

PART NO.	DATUM LENGTH (MM)	WEIGHT (LBS)
SPBRP2120	2120	4.13
SPBRP2240	2240	4.37
SPBRP2360	2360	4.60
SPBRP2500	2500	4.88
SPBRP2650	2650	5.17
SPBRP2800	2800	5.46
SPBRP3000	3000	5.85
SPBRP3150	3150	6.14
SPBRP3350	3350	6.53

PART NO.	DATUM LENGTH (MM)	WEIGHT (LBS)
SPBRP3550	3550	6.92
SPBRP3750	3750	7.31
SPBRP4000	4000	7.80
SPBRP4250	4250	8.29
SPBRP4500	4500	8.78
SPBRP4750	4750	9.26
SPBRP5000	5000	9.75
SPBRP5300	5300	10.34
SPBRP5600	5600	10.92

PART NO.	DATUM LENGTH (MM)	WEIGHT (LBS)
SPBRP6000	6000	11.70
SPBRP6300	6300	12.29
SPBRP6700	6700	13.07
SPBRP7100	7100	13.85
SPBRP7500	7500	14.63
SPBRP8000	8000	15.60

**SPB CONVERSION:** OUTSIDE LENGTH = DATUM LENGTH +22mm

SAMPLE PART # : SPCRP4750

**METRIC V-BELTS**

**SPC** SECTION : 22mm W x 18mm H

PART NO.	DATUM LENGTH (MM)	WEIGHT (LBS)
SPCRP2000	2000	7.54
SPCRP2120	2120	7.99
SPCRP2240	2240	8.44
SPCRP2360	2360	8.90
SPCRP2500	2500	9.43
SPCRP2650	2650	9.99
SPCRP2800	2800	10.56

PART NO.	DATUM LENGTH (MM)	WEIGHT (LBS)
SPCRP3000	3000	11.31
SPCRP3150	3150	11.88
SPCRP3350	3350	12.63
SPCRP3550	3550	13.38
SPCRP3750	3750	14.14
SPCRP4000	4000	15.08
SPCRP4250	4250	16.02

PART NO.	DATUM LENGTH (MM)	WEIGHT (LBS)
SPCRP4500	4500	16.97
SPCRP4750	4750	17.91
SPCRP5000	5000	18.85
SPCRP5300	5300	19.98
SPCRP5600	5600	21.11
SPCRP6000	6000	22.62
SPCRP6300	6300	23.75

PART NO.	DATUM LENGTH (MM)	WEIGHT (LBS)
SPCRP6700	6700	25.26
SPCRP7100	7100	26.77
SPCRP7500	7500	28.28
SPCRP8000	8000	30.16

**SPC CONVERSION:** OUTSIDE LENGTH = DATUM LENGTH +30mm

**CUSTOMER SERVICE**


**800-292-6081**  
**INFO@OPTIBELT-USA.COM**

**DID YOU KNOW?**

OPTIBELT's Set-Constant (S=C Plus) length tolerance makes your multiple belt drive run more efficiently. No other manufacturer can match OPTIBELT's precision.

**DRIVE PROBLEMS?**

Do you have old design, difficult idler placement or something entirely unique? Give Red Power a try. Its unique construction has solved many customer's difficult issues.

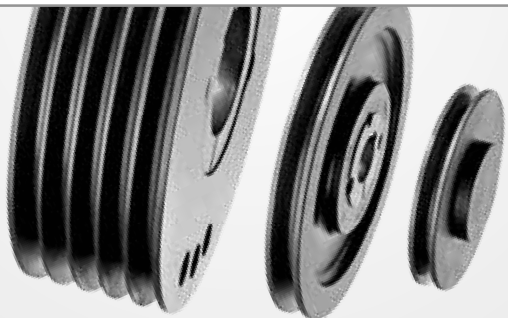

**NEED SHEAVES? SEE PAGE 133-139**

**124 KS SHEAVES, METRIC**

- 124-125 SECTIONS: SPZ/10
- 126-127 SECTIONS: SPA/13
- 128-130 SECTIONS: SPB/17
- 131-132 SECTIONS: SPC/22

**S=C Length Tolerances**

Standard on all OPTIBELT single V-belts and Wedge belts 47" in length and above. S=C Plus V-belts are always superior to a matched-set regardless of the date manufactured. Not available on aramid cord, banded or cogged belts.

**Custom Sizes & Ordering**

Section / Max. Mfg Lengths / Min. qty.  
 • SPB / 475 in. (12,500 mm) / 36  
 • SPC / 475 in. (12,500 mm) / 16  
 Contact customer service for details.

Contact an OPTIBELT representative regarding additional sizes, stock availability and pricing.

All weights are estimated.

Additional sizes and stocking available.