

- Home page
- About us
- Products
- Application
- Brand name
- Download Catalog
- Recruitment
- Contact

Valve

Concentric PARA-SEAL Valves

Control Valve

- Globe Valve
- Gate Valve
- Angle Valve
- Ball Valve
- Butterfly Valve



**Place of Origin: Japan**

**Payment Terms: L/C, T/T(Bank Transfer)**

**Send Business inquiry**

Ball Valve

Gate Valve

Globe Valve

Check Valve

Butterfly Valve

Safety Valve

Other Valve

**Specification**

Valve Size	3"(80A) to 60"(1500A)
Pressure Rating	ANSI Class 150 to 300, JIS 10K to 20K
End Connections	Wafer type
Body Material	SCPH2/WCB, SCS13A/CF8, SCS14A/CF8M etc.
Disc	SCPH2/WCB, SCS13A/CF8, SCS14A/CF8M etc.
Fluid temperature	-196 to +600°
Flow characteristics	Approximate Eq% (Inherent Characteristic)
Actuator combination	Pneumatic Cylinder Actuator Solid State Electronic Actuator Pneumatic Diaphragm Actuator

Actuator

Other Product

Eccentric PARA-SEAL Valves

**CONTACT US**



**HOTLINE: (84)-8-39110874**  
**LE HOANG NAM (Mr.)**  
**Mobile: +84-919-486-503**

EMAIL: [Sales@hisakadovn.com](mailto:Sales@hisakadovn.com)

## WEB LINK

株式会社 久門製作所  
HISAKADO CO., LTD



Place of Origin: Japan

Payment Terms: L/C, T/T(Bank Transfer)

Send Business inquiry

**Specification**

Valve Size	3"(80A) to 24"(600A)
Pressure Rating	ANSI Class 150 to 300, JIS 10K to 20K
End Connections	Wafer type / Flanged (RF)
Body Material	SCPH2/WCB, SCS13A/CF8, SCS14A/CF8M etc.
Disc	SCPH2/WCB, SCS13A/CF8, SCS14A/CF8M etc.
Fluid temperature	-196 to +500°
Flow characteristics	Approximate Eq% (Inherent Characteristic)
Actuator combination	Pneumatic Cylinder Actuator Solid State Electronic Actuator Pneumatic Diaphragm Actuator

Butterfly Valves / Casting Body type



Place of Origin: Japan


Payment Terms: L/C, T/T(Bank Transfer)

Send Business inquiry

**Specification**

Valve Size	3"(80A) to 128"(3200A)
Pressure Rating	ANSI Class 150 to 900, JIS 5K to 63K
End Connections	Wafer type / Flanged (RF)
Body Material	SCPH2/WCB, SCS13A/CF8, SCS14A/CF8M. etc. SS400, SUS304, SUS316. etc.
Disc	SCPH2/WCB, SCS13A/CF8, SCS14A/CF8M. etc. SS400, SUS304, SUS316. etc.
Fluid temperature	-45 to +600°
Flow characteristics	Approximate Eq% (Inherent Characteristics)
Actuator combination	Pneumatic Cylinder Actuator Solid State Electronic Actuator Pneumatic Diaphragm Actuator

Light Duty Valve

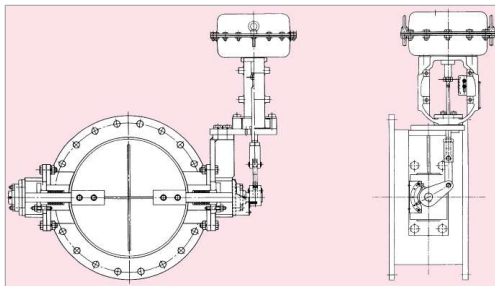

**Place of Origin: Japan**

**Payment Terms: L/C, T/T(Bank Transfer)**

**Send Business inquiry**

### Specification

Valve Type	Spring Diaphragm Actuated control valve
Body Type	Welding Steel Plate type Damper Welding Steel Plate type Step Seal
Valve Size	3"(80A) to 60"(1500A)
End Connections - Rating	Flange end JIS2K, 5K, 10K FF/RF ANSI/JPI Class 150
Body Material	SS400, SUS304, SUS316
Applicable Temperature	0°C to +750°C
Accessories	Pneumatic Positioner Electro Pneumatic Positioner Air filter regulator, Limit switch, Solenoid Valve, Booster relay, Speed controller, Pneumatic operated valve

[Home page](#)

[About us](#)

[Products](#)

[Application](#)

[Brand name](#)

[Download Catalog](#)

[Recruitment](#)

[Contact](#)

#### HISAKADO VIET NAM CO., LTD

**Add:** Ground Floor, Villa No.3, 2Bis Nguyen Thi Minh Khai Street, Da Kao Ward, District 1, HCM City, VietNam

**Tel:** (84)-8-39110874

**FAX:** (84)-8-3911-7516

**Email:** Sales@hisakadovn.com;

**Power by: BR Viet Nam**