


COPPER TUBE CRIMPING LUGS

for Copper conductors

A-M



File no. E125401

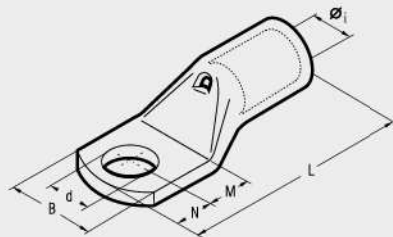

Cond. Size sqmm	Ø Stud mm	Ref.	Dimensions mm						Quantity Box/Bag	Mechanical Tools	Hydraulic Tools
			Øi	B	M	N	L	d			
95	70	6	A 19-M 6	13,5	25,0	8,0	7,0	50,5	6,4	100/25	RH 50 RH 81-J RHU 81
		8	A 19-M 8	13,5	25,0	9,0	8,0	52,5	8,4	100/25	
		10	A 19-M 10	13,5	25,0	11,0	10,0	56,5	10,5	100/25	
		12	A 19-M 12	13,5	25,0	14,0	12,0	61,5	13,2	100/25	
		14	A 19-M 14	13,5	25,0	16,0	14,0	65,5	15,0	100/25	
		16	A 19-M 16	13,5	27,0	18,0	16,0	69,5	17,0	100/25	
120	95	20	A 19-M 20	13,5	29,5	22,0	20,0	77,5	21,0	50/25	TM 120 SE** B 35-45/MD B 35-50/MD HT 45-E
		8	A 24-M 8	15,2	28,5	9,0	8,0	54,0	8,4	100/25	
		10	A 24-M 10	15,2	28,5	11,0	10,0	58,0	10,5	100/25	
		12	A 24-M 12	15,2	28,5	14,0	12,0	63,0	13,2	100/25	
		14	A 24-M 14	15,2	28,5	16,0	14,0	67,0	15,0	50/25	
		16	A 24-M 16	15,2	28,5	18,0	16,0	71,0	17,0	50/25	
150	120	20	A 24-M 20	15,2	30,0	22,0	20,0	79,0	21,0	50/25	HT 51 B 50/E RH 50 HT 81-J RHU 81
		8	A 30-M 8	16,7	31,5	13,0	11,0	69,0	8,4	50/25	
		10	A 30-M 10	16,7	31,5	13,0	11,0	69,0	10,5	50/25	
		12	A 30-M 12	16,7	31,5	16,0	14,0	75,0	13,2	50/25	
		14	A 30-M 14	16,7	31,5	18,0	16,0	79,0	15,0	50/25	
		16	A 30-M 16	16,7	31,5	19,0	17,0	81,0	17,0	50/25	
185	150	20	A 30-M 20	16,7	31,5	22,0	20,0	87,0	21,0	50/25	HT 120 and tools and heads with 130 kN crimping force EDW-H30 RHU 520
		8	A 37-M 8	19,2	35,5	13,0	11,0	76,0	8,4	50/25	
		10	A 37-M 10	19,2	35,5	13,0	11,0	76,0	10,5	40/20	
		12	A 37-M 12	19,2	35,5	16,0	14,0	82,0	13,2	40/20	
		14	A 37-M 14	19,2	35,5	18,0	16,0	86,0	15,0	30/15	
		16	A 37-M 16	19,2	35,5	19,0	17,0	88,0	17,0	30/15	
240	185	20	A 37-M 20	19,2	35,5	22,0	20,0	94,0	21,0	30/15	
		8	A 48-M 8	21,1	39,0	13,0	11,0	77,5	8,4	30/15	
		10	A 48-M 10	21,1	39,0	13,0	11,0	77,5	10,5	30/15	
		12	A 48-M 12	21,1	39,0	14,0	12,0	79,5	13,2	30/15	
		14	A 48-M 14	21,1	39,0	18,0	16,0	92,0	15,0	30/15	
		16	A 48-M 16	21,1	39,0	19,0	17,0	94,0	17,0	30/15	
300	240	20	A 48-M 20	21,1	39,0	22,0	20,0	100,0	21,0	30/15	
		10	A 60-M 10	23,7	44,0	20,0	11,0	96,0	10,5	20/10	
		12	A 60-M 12	23,7	44,0	20,0	14,0	99,0	13,2	20/10	
		14	A 60-M 14	23,7	44,0	22,0	16,0	103,0	15,0	20/10	
		16	A 60-M 16	23,7	44,0	22,0	19,0	106,0	17,0	20/10	
		20	A 60-M 20	23,7	44,0	24,0	23,0	112,0	21,0	20/10	
400	300	12	A 80-M 12	27,0	51,0	22,0	19,0	113,0	13,2	20/5	
		14	A 80-M 14	27,0	51,0	22,0	19,0	113,0	15,0	15/5	
		16	A 80-M 16	27,0	51,0	22,0	19,0	113,0	17,0	15/5	
		20	A 80-M 20	27,0	51,0	24,0	23,0	119,0	21,0	15/5	
		16	A 100-M 16	30,3	56,5	22,0	19,0	117,0	17,0	15/1	
		20	A 100-M 20	30,3	56,5	24,0	23,0	123,0	21,0	15/1	
630	500	16	A 120-M 16*	33,4	61,6	22,0	19,0	128,0	17,0	12/1	
		20	A 120-M 20*	33,4	61,6	24,0	23,0	134,0	21,0	10/1	
800	630	16	A 160-M 16*	38,0	72,0	24,0	19,0	141,0	17,0	6/1	
		20	A 160-M 20*	38,0	72,0	24,0	23,0	145,0	21,0	6/3	
1000	800	16	A 200-M 16*	44,0	80,0	24,0	19,0	158,0	17,0	6/1	
		20	A 200-M 20*	44,0	80,0	24,0	23,0	162,0	21,0	6/1	

*Actual conductor section may require a larger lug eg for 120mm² size use A30-... lug.

**See page 111



Isolated covers made of PVC for subsequent isolation of the uninsulated connectors, see page 33.



*Not UL approved