



Street Elbows

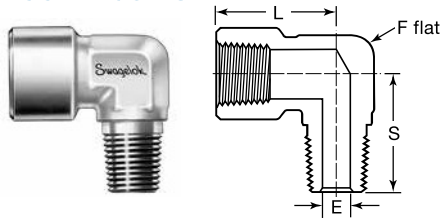

Female to Male NPT

NPT Size in.	Basic Ordering Number	Dimensions, in. (mm)				Pressure Ratings psig (bar)				
		E	L	S	F	316 SS, Carbon Steel	Brass	Alloy 2507, Alloy 625	6-Moly	Alloy 825
1/16	-1-SE	0.12 (3.0)	0.86 (21.8)	0.88 (22.4)	7/16	9 200 (633)	4 600 (316)	15 000 (1 033)	12 400 (854)	10 700 (737)
1/8	-2-SE	0.19 (4.8)	1.04 (26.4)	0.87 (22.1)	1/2	6 500 (447)	3 200 (220)	12 500 (861)	8 800 (606)	7 500 (516)
1/4	-4-SE	0.28 (7.1)	1.17 (29.7)	1.17 (29.7)	11/16	7 200 (496)	3 600 (248)	13 900 (957)	9 700 (668)	8 300 (571)
3/8	-6-SE	0.38 (9.6)	1.42 (36.1)	1.26 (32.0)	13/16	5 600 (385)	2 800 (192)	10 800 (744)	7 500 (516)	6 500 (447)
1/2	-8-SE	0.47 (11.9)	1.56 (39.6)	1.56 (39.6)	1	5 600 (385)	2 800 (192)	10 800 (744)	7 500 (516)	6 500 (447)
3/4	-12-SE	0.62 (15.7)	1.92 (48.8)	1.67 (42.4)	1 1/4	5 100 (351)	2 500 (172)	9 800 (675)	6 900 (475)	5 900 (406)
1	-16-SE	0.88 (22.4)	1.91 (48.5)	1.94 (49.3)	1 11/16	5 300 (365)	2 600 (179)	10 000 (689)	7 100 (489)	6 100 (420)

Reducing Street Elbows

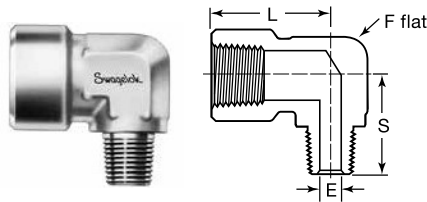

Female to Male NPT

Female NPT Size in.	Male NPT Size in.	Basic Ordering Number	Dimensions in. (mm)				Pressure Ratings psig (bar)				
			E	L	S	F	316 SS, Carbon Steel	Brass	Alloy 2507, Alloy 625	6-Moly	Alloy 825
1/8	1/16	-2-RSE-1	0.12 (3.0)	1.04 (26.4)	0.87 (22.1)	1/2	6 500 (447)	3 200 (220)	12 500 (861)	8 800 (606)	7 500 (516)
1/4	1/8	-4-RSE-2	0.19 (4.8)	1.17 (29.7)	1.00 (25.4)	11/16	7 200 (496)	3 600 (248)	13 900 (957)	9 700 (668)	8 300 (571)
3/8	1/4	-6-RSE-4	0.28 (7.1)	1.42 (36.1)	1.26 (32.0)	13/16	5 600 (385)	2 800 (192)	10 800 (744)	7 500 (516)	6 500 (447)
1/2	1/4	-8-RSE-4	0.28 (7.1)	1.56 (39.6)	1.38 (35.1)	1	5 600 (385)	2 800 (192)	10 800 (744)	7 500 (516)	6 500 (447)
	3/8	-8-RSE-6	0.38 (9.6)	1.56 (39.6)	1.38 (35.1)	1	5 600 (385)	2 800 (192)	10 800 (744)	7 500 (516)	6 500 (447)