


Float Equipment Manual
Section - Page 3-41
Revision H 06/26/06

402 FLOAT COLLAR SURE SEAL 3

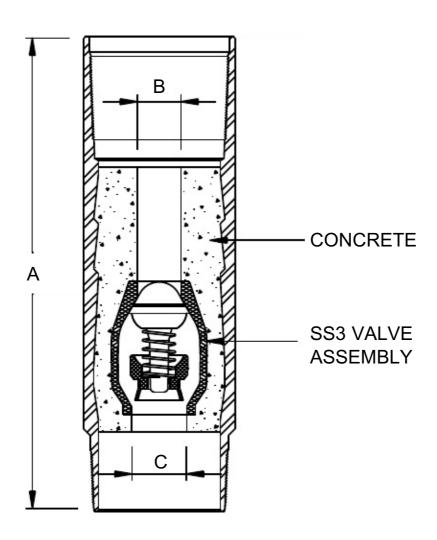

SPECIFICATIONS

		DRILLOUT		Α			
SIZE	GRADE	I.D.	O.D.	8 ROUND	BUTTRESS	В	C
5-1/2	STD./ P.G.	4.907 / 4.787	6.05	17.75 / 18.25	19.50	9	
6-5/8	STD./ P.G.	5.944	7.39	18.25 / 19.00	20.00	2.00	2.50
0						2.00	2.50
7-5/8	STB://P:6:	6.3561.8664270	8:95	18:59 / 19:35	2 9: 7 5		
8-5/8	STD./ P.G.	7.992 / 7.845	9.63	21.00 / 22.25		9	
9-5/8	STD./ P.G.	8.865 / 8.699	10.63	21.25 / 22.75			
10-3/4	STD./ P.G.	10.058 / 9.770	11.75		22.75		
11-3/4	STD./ P.G.	11.020 / 10.770	12.75	20.25		2.50	3.00
13-3/8	STD./ P.G.	12.579	14.38			2.30	3.00
16	STD.	15.124	17.00				
18-5/8	STD.	17.755	20.00	21.75	23.25		
20	STD.	19.125	21.00				

[©] Copyright Weatherford 2005 All rights reserved This document is copyrighted and whether containing patentable or nonpatentable subject matter is and comprises the proprietary and confidential information of Weatherford International Ltd. and by receiving this document the recipient agrees that this document is loaned in confidence with the understanding that neither i nor the information in it will be reproduced or disclosed, in whole or in part for any purpose except the limited purpose for which it is loaned. This document and any facsimilies hereof shall I returned to Weatherford International Ltd. upon demand.