

# 1769 Compact I/O Modules Specifications

## Catalog Numbers

|                     |  |
|---------------------|--|
| Digital I/O Modules | 1769-IA8I, 1769-IA8IK, 1769-IA16, 1769-IA16K, 1769-IM12, 1769-OA8, 1769-OA16, 1769-OA16K, 1769-IG16, 1769-IQ16, 1769-IQ16K, 1769-IQ16F, 1769-IQ32, 1769-IQ32K, 1769-IQ32T, 1769-IQ6XOW4, 1769-OB8, 1769-OB8K, 1769-OB16, 1769-OB16K, 1769-OB16P, 1769-OB32, 1769-OB32K, 1769-OB32T, 1769-OG16, 1769-OV16, 1769-OV32T |
| Contact I/O Modules | 1769-OW8, 1769-OW8I, 1769-OW8IK, 1769-OW16, 1769-OW16K   |
| Analog I/O Modules  | 1769-IF4, 1F4K, 1769-IF4I, 1769-IF4XOF2, 1769-IF4XOF2K, 1769-IF4FXOF2F, 1769-IF8, 1769-IF8K, 1769-IF16C, 1769-IF16V, 1769-IR6, 1769-IT6, 1769-OF2, 1769-OF2K, 1769-OF4, 1769-OF4K, 1769-OF4CI, 1769-OF4VI, 1769-OF8C, 1769-OF8V  |
| Specialty Modules   | 1769-ARM, 1769-ASCII, 1769-BOOLEAN, 1769-HSC, 1769-SM2   |
| Accessories         | 1769-ECL, 1769-ECLK, 1769-ECR, 1769-ECRK, 1769-ECL, 1769-ECLK, 1769-ECR, 1769-ECRK, 1769-CLL1, 1769-CRR1, 1769-CRL1, 1769-CLL3, 1769-CRR3, 1769-CRL3   |

| Topic                           | Page |
|---------------------------------|------|
| Summary of Changes              | 2    |
| I/O Module Overview             | 2    |
| Environmental Specifications    | 2    |
| Certifications                  | 3    |
| Place Compact I/O Modules       | 4    |
| Digital I/O Modules             | 5    |
| Contact I/O Modules             | 25   |
| Analog I/O Modules              | 29   |
| Specialty I/O Modules           | 53   |
| Compact I/O Mounting Dimensions | 61   |
| Compact I/O Accessories         | 61   |
| Wiring Systems                  | 64   |
| Additional Resources            | 65   |

The 1769 Compact I/O™ modules can be used in these applications:

- With a 1769 CompactLogix™ controller
- For expansion I/O in a MicroLogix™ 1500 controller assembly
- In an assembly with a 1769-ADN DeviceNet® adapter
- In an assembly with a 1769-AENTR Ethernet adapter

Unless connected to a MicroLogix 1500 base, each bank of I/O modules must include its own power supply.

Install the I/O modules on a panel with two mounting screws or on a DIN rail. The modules mechanically lock together with a tongue-and-groove design and have an integrated communication bus that is connected from module to module by a movable bus connector.

## Summary of Changes


This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes.

| Topic   | Page       |
|---|------------|
| Added modules: 1769-IA16K, 1769-IA81K, 1769-IF4K, 1769-IF4XOF2K, 1769-IF8K, 1769-IQ16K, 1769-IQ32K, 1769-OA16K, 1769-OB16K, 1769-OB32K, 1769-OB8K, 1769-OF2K, 1769-OF4K, 1769-OW16K, 1769-OW81K, 1769-SM2 | Throughout |
| Updated certifications  | 3          |

## I/O Module Overview

Each I/O module includes a built-in removable terminal block with fingersafe cover for connections to I/O sensors and actuators. The terminal block is behind a door at the front of the module. I/O wiring can be routed from beneath the module to the I/O terminals.

- Once the modules are locked together, the system becomes a rugged assembly.
- Upper and lower tongue-and-groove slots guide the module during installation and attach the module to the system.
- Removable terminal blocks help ease the wiring task.
- Self-lifting, field-wire pressure plates cut installation time.
- The patented bus connector with the lock function enables consistent and system communication.
- A color bar is provided on the front of the module.
- Digital and field circuits are optically isolated.

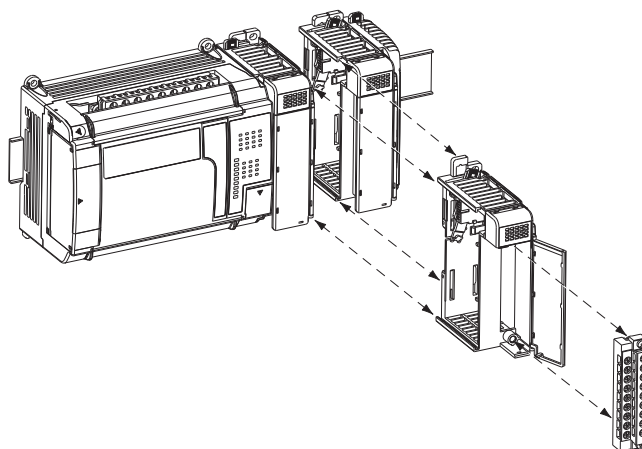

## Environmental Specifications<sup>(1)</sup>

| Attribute  | 1769-IA8I, 1769-IA81K, 1769-IA16, 1769-IA16K, 1769-IF4, 1769-IF4K, 1769-IF4XOF2, 1769-IF4XOF2K, 1769-IM12, 1769-IQ16, 1769-IQ16K, 1769-IQ16F, 1769-IQ32, 1769-IQ32K, 1769-IQ6XOW4, 1769-IR6, 1769-IT6, 1769-OA8, 1769-OA16, 1769-OA16K, 1769-OB8, 1769-OB8K, 1769-OB16, 1769-OB16K, 1769-OB16P, 1769-OB32, 1769-OB32K, 1769-OV16, 1769-OW8, 1769-OW8I, 1769-OW81K, 1769-OW16, 1769-OW16K, 1769-ARM, 1756-HSC | 1769-IG16, 1769-IF4FXOF2F, 1769-IF4I, 1769-IF8, 1769-IF8K, 1769-IF16C, 1769-IF16V, 1769-IQ32T, 1769-OB32T, 1769-OG16, 1769-OV32T, 1769-OF2, 1769-OF2K, 1769-OF4, 1769-OF4K, 1769-OF4CI, 1769-OF4VI, 1769-OF8C, 1769-OF8V, 1769-ASCII, 1769-BOOLEAN |
|--|--|--|
| Temperature, operating<br>IEC 60068-2-1 (Test Ad, Operating Cold),<br>IEC 60068-2-2 (Test Bd, Operating Dry Heat),<br>IEC 60068-2-14 (Test Nb, Operating Thermal Shock)  | 0...60 °C (32...140 °F)  |  |
| Temperature, nonoperating<br>IEC 60068-2-1 (Test Allen-Bradley®, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),<br>IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F)   |  |
| Relative humidity<br>IEC 60068-2-30 (Test Db, Unpackaged Nonoperating Damp Heat)   | 5...95% noncondensing  |  |
| Vibration<br>IEC 60068-2-6 (Test Fc, Operating)  | Operating: 5 g @ 10...500 Hz<br>Relay operating: 2 g   | 5 g @ 10...500 Hz  |
| Shock, operating<br>IEC 60068-2-27 (Test Ea, Unpackaged Shock)   | Panel mount 30 g<br>DIN rail mount 20 g  |  |
| Shock, relay operating<br>IEC 60068-2-27 (Test Ea, Unpackaged Shock)   | Panel mount 7.5 g<br>DIN rail mount 5 g  | —  |
| Shock, nonoperating<br>IEC 60068-2-27 (Test Ea, Unpackaged Shock)  | Panel mount 40 g<br>DIN rail mount 30 g  |  |

(1) Environmental Specifications for the 1769-SM2 module are found on page 60.

# Certifications

## Certifications - 1769 Compact I/O Digital and Contact Modules

| Certification <sup>(1)</sup> | 1769-IA8I, 1769-IA8IK, 1769-IA16, 1769-IA16K, 1769-OA8, 1769-OA16, 1769-OA16K, 1769-OW8, 1769-OW8I, 1769-OW8IK, 1769-OW16, 1769-OW16K   | 1769-IM12, 1769-IQ6XOW4 | 1769-IG16, 1769-IQ16, 1769-IQ16K, 1769-IQ16F, 1769-IQ32, 1769-IQ32K, 1769-IQ32T, 1769-OB8, 1769-OB8K, 1769-OB16, 1769-OB16K, 1769-OB16P, 1769-OB32, 1769-OB32K, 1769-OB32T, 1769-OG16, 1769-OV16, 1769-OV32T  |
|------------------------------|---|-------------------------|---|
| c-UL-us                      | UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.  |                         |   |
| UKCA and CE                  | UK Statutory Instrument 2016 No. 1101 and European Union 2014/35/EU LVD Directive, compliant with:<br>EN 61131-2; Programmable Controllers (pertinent LVD sections only)<br><br>UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br>EN 61000-6-2; Industrial Immunity<br>EN 61000-6-4; Industrial Emissions<br><br>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS Directive, compliant with:<br>EN IEC 63000; Technical Documentation |                         | UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br>EN 61000-6-2; Industrial Immunity<br>EN 61000-6-4; Industrial Emissions<br><br>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:<br>EN IEC 63000; Technical Documentation |
| RCM                          | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions  |                         |   |
| KC                           | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3   |                         |   |
| Morocco                      | Arrêté ministériel n° 6404-15 du 1er muharram 1437<br>Arrêté ministériel n° 6404-15 du 29 ramadan 1436  |                         |   |

(1) When marked. See the Product Certification link at [rok.auto/certifications](http://rok.auto/certifications) for Declarations of Conformity, Certificates, and other certification details.

## Certifications - 1769 Compact I/O Analog Modules

| Certification <sup>(1)</sup> | 1769-IF4, 1769-IF4K, 1769-IF4XOF2, 1769-IF4XOF2K, 1769-IF4XOF2F, 1769-IF8, 1769-IF8K, 1769-OF2, 1769-OF2K   | 1769-IF4I, 1769-IT6, 1769-OF4CI, 1769-OF4VI, 1769-OF8C, 1769-OF8V  | 1769-IF16C, 1769-IF16V  | 1769-IR6   | 1769-OF4, 1769-OF4K   |
|------------------------------|---|--|---|--|---|
| c-UL-us                      | UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.  | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584.<br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E10314.<br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E10314. | UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.<br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470. |
| UKCA and CE                  | UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br>EN 61000-6-2; Industrial Immunity<br>EN 61000-6-4; Industrial Emissions<br><br>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:<br>EN IEC 63000; Technical documentation |  |   |  |   |
| RCM                          | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions  |  |   |  |   |
| KC                           | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3   |  |   |  |   |
| Morocco                      | Arrêté ministériel n° 6404-15 du 1er muharram 1437<br>Arrêté ministériel n° 6404-15 du 29 ramadan 1436  |  |   |  |   |

(1) When marked. See the Product Certification link at [rok.auto/certifications](http://rok.auto/certifications) for Declarations of Conformity, Certificates, and other certification details.

## Certifications - Specialty Modules

| Certification <sup>(1)</sup> | 1769-ARM, 1769-ASCII, 1769-BOOLEAN  | 1769-HSC  | 1769-SM2 <sup>(2)(3)</sup>   |
|------------------------------|---|---|--|
| c-UL-us                      | UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.  | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.<br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470. | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E59272. |
| UKCA and CE                  | UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br>EN 61000-6-2; Industrial Immunity<br>EN 61000-6-4; Industrial Emissions<br><br>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:<br>EN IEC 63000; Technical documentation |   |  |
| RCM                          | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions  |   |  |
| KC                           | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3   |   |  |
| Morocco                      | Arrêté ministériel n° 6404-15 du 1er muharram 1437<br>Arrêté ministériel n° 6404-15 du 29 ramadan 1436  |   |  |

(1) When marked. See the Product Certification link at [rok.auto/certifications](http://rok.auto/certifications) for Declarations of Conformity, Certificates, and other certification details.

(2) In a domestic environment, this product can cause radio interference in which case supplementary mitigation measures can be required.

(3) To remain CE, a ferrite core (Fair-Rite part number 2643102002) must be added to DSI communication cables longer than 10 m (33 ft.), and the core must be attached within 305 mm (12 in.) of the 1769-SM2 module.

## Digital I/O Modules

Choose digital I/O modules when you need these features.

| Type   | Description  |
|--------|--|
| Input  | <p>An input module responds to an input signal in this manner:</p> <ul style="list-style-type: none"> <li>Input filtering limits the effect of voltage transients that contact bounce and/or electrical noise cause. If not filtered, voltage transients could produce false data. All input modules use input filtering.</li> <li>Optical isolation shields logic circuits from possible damage due to electrical transients.</li> <li>Logic circuits process the signal.</li> <li>An input indicator turns on or off, which indicates the status of the corresponding input device.</li> </ul> |
| Output | <p>An output module controls the output signal in this manner:</p> <ul style="list-style-type: none"> <li>Logic circuits determine the output status.</li> <li>An output indicator displays the status of the output signal.</li> <li>Optical isolation separates module logic and bus circuits from field power.</li> <li>The output driver turns the corresponding output on or off.</li> </ul>  |

Most output modules have built-in surge suppression to reduce the effects of high-voltage transients. Use an additional suppression device if an output is being used to control inductive devices, such as relays, motor starters, solenoids, or motors.

Additional suppression is especially important if your inductive device is in series with or parallel to hard contacts, such as push buttons or selector switches. Add a suppression device directly across the coil of an inductive device. The suppression device reduces the effects of voltage transients that are caused by interrupting the current to that device and to prolong the life of the switch contacts.


These digital modules are available.

| I/O Type          | Cat. No.              | Description  | Page |
|-------------------|-----------------------|--|------|
| AC digital input  | 1769-IA81, 1769-IA81K | Compact individually isolated 120V AC input module                         | 6    |
|                   | 1769-IA16, 1769-IA16K | Compact 120V AC input module   | 7    |
|                   | 1769-IM12             | Compact 240V AC input module   | 8    |
| AC digital output | 1769-OA8              | Compact 100/240V AC solid-state output module                              | 9    |
|                   | 1769-OA16, 1769-OA16K | Compact 120/240V AC solid-state output module                              | 10   |
| DC digital input  | 1769-IG16             | Compact TTL input module   | 11   |
|                   | 1769-IQ16, 1769-IQ16K | Compact 24V DC sink/source input module                                    | 12   |
|                   | 1769-IQ16F            | Compact 24V DC sink/source, high-speed input module                        | 13   |
|                   | 1769-IQ32, 1769-IQ32K | Compact 24V DC sink/source input module                                    | 14   |
|                   | 1769-IQ32T            | Compact 24V DC sink/source, terminated input module                        | 15   |
|                   | 1769-IQ6XOW4          | Compact combination 24V DC sink/source input and AC/DC relay output module | 16   |
| DC digital output | 1769-OB8, 1769-OB8K   | Compact solid-state 24V DC source, high-current output module              | 17   |
|                   | 1769-OB16, 1769-OB16K | Compact solid-state 24V DC source output module                            | 18   |
|                   | 1769-OB16P            | Compact solid-state 24V DC source, protected output module                 | 19   |
|                   | 1769-OB32, 1769-OB32K | Compact solid-state 24V DC source output module                            | 20   |
|                   | 1769-OB32T            | Compact solid-state 24V DC source, terminated output module                | 21   |
|                   | 1769-OG16             | Compact TTL output module  | 22   |
|                   | 1769-OV16             | Compact solid-state 24V DC sink output module                              | 23   |
|                   | 1769-OV32T            | Compact solid-state 24V DC sink, terminated output module                  | 24   |


## 1769-IQ16, 1769-IQ16K

### Compact 24V DC sink/source input module

Simplified Input Circuit Diagram

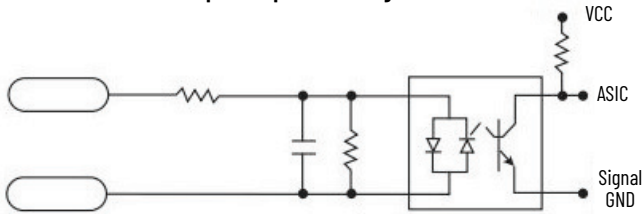

Input Wiring

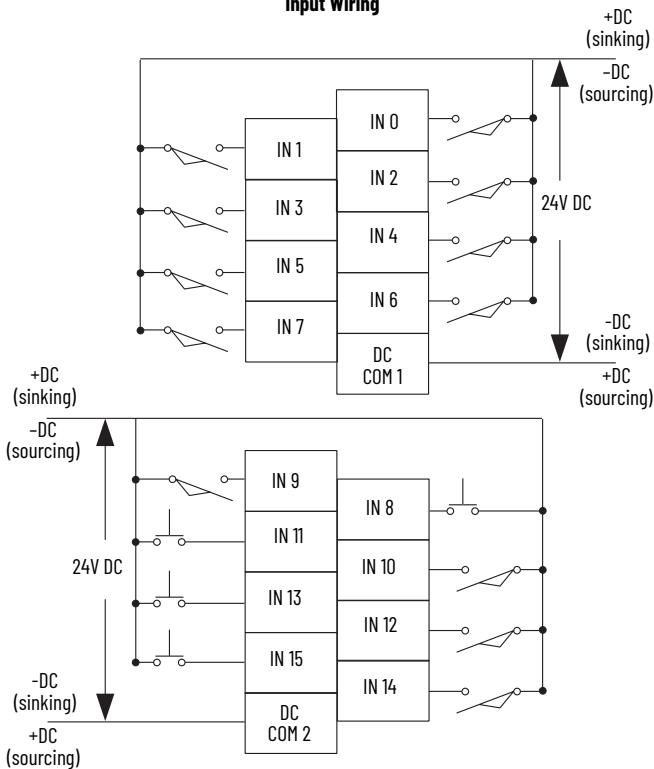

### Technical Specifications - 1769-IQ16, 1769-IQ16K


| Attribute                    | 1769-IQ16, 1769-IQ16K  |
|------------------------------|--|
| Inputs                       | 16 (8 points/group)  |
| Voltage category             | 24V DC sink/source   |
| Operating voltage range      | 10...30V DC @ 30 °C (86 °F)<br>10...26.4V DC @ 60 °C (140 °F)  |
| Input delay, on              | 8 ms   |
| Input delay, off             | 8 ms   |
| Current draw @ 5.1V          | 115 mA   |
| Heat dissipation, max        | 3.55 W   |
| Off-state voltage, max       | 5V DC  |
| Off-state current, max       | 1.5 mA   |
| On-state voltage, min        | 10V DC   |
| On-state current, min        | 2 mA   |
| Inrush current, max          | 250 mA   |
| Input impedance, nom         | 3 kW   |
| Isolation voltage            | Verified by one of these dielectric tests: 1200V AC for 1 s or 1697V DC for 1 s, input point to bus and group to group 75V DC working voltage (IEC Class II reinforced insulation) |
| Weight, approx               | 270 g (0.60 lb)  |
| Dimensions (HxWxD), approx   | 118 x 35 x 87 mm (4.65 x 1.38 x 3.43 in.)<br>Height with mounting tabs 138 mm (5.43 in.)   |
| Slot width                   | 1  |
| Module location              | DIN rail or panel mount  |
| Power supply                 | 1769-PA2, 1769-PB2, 1769-PA4, 1769-PB4   |
| Power supply distance rating | 8 modules  |
| Terminal screw torque        | 0.68 N•m (6 lb•in)   |
| Retaining screw torque       | 0.46 N•m (4.1 lb•in)   |
| Wire size                    | (22...14 AWG) solid<br>(22...16 AWG) stranded  |
| Wire type                    | Cu-90 °C (194 °F)  |
| IEC input compatibility      | Type 1+  |
| Replacement terminal block   | 1769-RTBN18 (1 per kit)  |
| Replacement door label       | 1769-RL1 (2 per kit)   |
| Replacement door             | 1769-RD (2 per kit)  |
| Vendor ID code               | 1  |
| Product type code            | 7  |
| Product code                 | 67   |
| Enclosure type rating        | None (open-style)  |

For **Environmental Specifications**, see [page 2](#).

For **Certifications**, see [page 3](#).

## 1769-IQ16F

## Compact 24V DC sink/source, high-speed input module

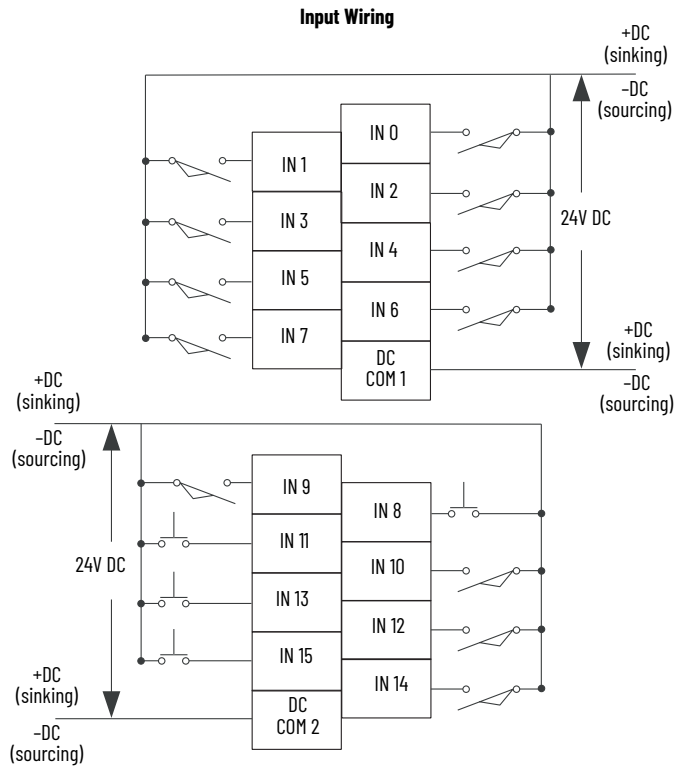

## Technical Specifications - 1769-IQ16F

| Attribute                    | 1769-IQ16F  |
|------------------------------|---|
| Inputs                       | 16 (8 points/group)   |
| Voltage category             | 24V DC sink/source  |
| Operating voltage range      | 10...30V DC @ 30 °C (86 °F)<br>10...26.4V DC @ 60 °C (140 °F)   |
| Digital filter, off to on    | 0 s, 100 ms, 500 ms, 1 ms, 2 ms   |
| Digital filter, on to off    | 0 s, 100 ms, 500 ms, 1 ms, 2 ms   |
| Input delay, off to on       | 100 ms, typical<br>300 ms, max  |
| Input delay, on to off       | 250 ms, typical<br>1 ms, max  |
| Current draw @ 5.1V          | 110 mA  |
| Heat dissipation, max        | 3.55 W  |
| Off-state voltage, max       | 5V DC   |
| Off-state current, max       | 1.5 mA  |
| On-state voltage, min        | 10V DC  |
| On-state current, min        | 2 mA  |
| Inrush current, max          | 250 mA  |
| Input impedance, nom         | 3 kW  |
| Isolation voltage            | Verified by one of these dielectric tests: 1200V AC for 1 s or 1697V DC for 1 s, input point to bus and group to group<br>75V DC working voltage (IEC Class II reinforced insulation) |
| Weight, approx               | 270 g (0.60 lb)   |
| Dimensions (HxWxD), approx   | 118 x 35 x 87 mm (4.65 x 1.38 x 3.43 in.)<br>Height with mounting tabs 138 mm (5.43 in.)  |
| Slot width                   | 1   |
| Module location              | DIN rail or panel mount   |
| Power supply                 | 1769-PA2, 1769-PB2, 1769-PA4, 1769-PB4  |
| Power supply distance rating | 8 modules   |
| Terminal screw torque        | 0.68 N•m (6 lb•in)  |
| Retaining screw torque       | 0.46 N•m (4.1 lb•in)  |
| Wire size                    | (22...14 AWG) solid<br>(22...16 AWG) stranded   |
| Wire type                    | Cu-90 °C (194 °F)   |
| IEC input compatibility      | Type 1+   |
| Replacement terminal block   | 1769-RTBN18 (1 per kit)   |
| Replacement door label       | 1769-RL1 (2 per kit)  |
| Replacement door             | 1769-RD (2 per kit)   |
| Vendor ID code               | 1   |
| Product type code            | 7   |
| Product code                 | 69  |
| Enclosure type rating        | None (open-style)   |

For **Environmental Specifications**, see [page 2](#).

For **Certifications**, see [page 3](#).