































WIRE ROPE


By cultivating good and professional relationships with our customers and principals, we have risen rapidly to become one of the leading wire rope distributor. Our steel ropes are manufactured according to international standards and made to the latest international specifications, such as API 9A and ISO 9002.



					
6x7 + FC	6x19S + FC	6x19S + IWRC	6x25Fi + FC	6x25Fi + IWRC	6x26WS + FC
					
6x26WS + IWRC	6x29Fi + FC	6x29Fi + IWRC	6x31WS + FC	6x31WS + IWRC	6x36WS + FC
					
6x36WS + IWRC	8x19S + FC	8x19S + IWRC	8x25Fi + FC	8x25Fi + IWRC	8x26WS + FC
					
8x26WS IWRC	8x31WS + FC	8x31WS + IWRC	8x36WS + FC	8x36WS + IWRC	8X41WS + FC
					
8X41WS + IWRC	18X7 + FC	18X7 + WSC	18X19S + WSC	18X19S + WSC	1X7

★ ROUND STRANDED WIRE ROPE
Used for Coring, Sand and Swabbing line

- Type : Round Stranded Wire rope
- Rope type : 6 x 7 (6/1) FC
- Rope Construction : 6 x 7 FC




6x7 FC



Rope Dia. (mm)	Approx. Weight kg/100 m	Tensile Strength		
		Minimum breaking load (KN)		
	Fiber Core	1770 Mpa	1870 Mpa	1960 Mpa
6	12.4	21.2	22.4	23.4
8	22	37.6	39.7	41.6
9	27.9	47.6	50.3	52.7
10	34.4	58.8	62.1	65.1
11	41.6	71.1	75.1	78.7
12	49.5	86.6	89.4	93.7
13	58.1	99.3	105	110
14	67.4	115	122	128
16	88.1	150	159	167
18	111	190	201	211
20	138	235	248	260
22	166	284	300	315
24	198	338	358	375
26	233	397	420	440
28	270	461	487	510
30	310	529	559	586
32	352	602	636	666
34	398	679	718	752
36	446	762	805	843




Note: According to the requirements of customers, we can supply the products of other specifications.

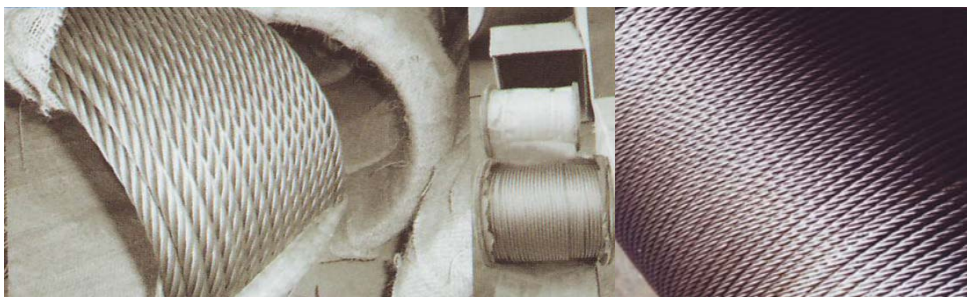


★ ROUND STRANDED WIRE ROPE

Used for crane, lifting, hauling, hoist and drilling.

- Type : Round Stranded Wire rope
- Rope type : 6 x 19 (9/9/1)
- Rope Construction : 6 x 19S + FC 6 x 19S + IWRC



6x19S + FC



6x19S + IWRC




Rope Dia. (mm)	Approx. Weight kg/100 m		Tensile Strength					
			1570 Mpa		1770 Mpa		1960 Mpa	
	Fiber Core	Steel Core	Fiber core	Steel core	Fiber core	Steel core	Fiber core	Steel core
	Minimum breaking load (KN)							
6	13.5	14.9	18.6	20.1	21.0	22.6	23.3	25.1
8	24.1	26.5	33.1	35.7	37.3	40.3	41.4	44.7
9	30.5	33.5	41.9	45.2	47.3	51.0	52.4	56.5
10	37.6	41.4	51.8	55.8	58.4	63.0	64.7	69.8
11	45.5	50.0	62.6	67.6	70.6	76.2	78.3	84.4
12	51.8	58.4	74.6	80.5	84.1	90.7	93.1	100
13	60.8	68.5	87.6	94.5	98.7	106	109	118
14	70.5	79.5	102	110	114	124	127	137
16	92.1	104	133	143	150	161	166	179
18	117	131	168	181	189	204	210	226
20	144	162	207	224	234	252	259	279
22	174	196	251	271	283	304	313	338
24	207	234	298	322	336	363	373	402
26	243	274	350	378	395	426	437	472
28	282	318	406	438	458	494	507	547
30	324	365	466	503	526	567	582	628
32	369	415	531	572	598	645	662	715
34	416	469	599	646	675	728	748	807
36	466	525	671	724	757	817	838	904
38	520	585	748	807	843	910	934	1010
40	576	649	829	894	935	1010	1030	1120
42	654	737	914	986	1030	1112	1141	1231



*** ROUND STRANDED WIRE ROPE**

- Rope type : 6 x 25 (12/6+6F/1) 6 x 26 (10/5+5/5/1)
6 x 29 (14/7+7F/1) 6 x 31 (12/6&6/6/1)
6 x 36 (14/7&7/7/1)


- Rope Construction : 6 x 25Fi + FC 6 x 25Fi + IWRC
6 x 26WS + FC 6 x 26WS + IWRC
6 x 29Fi + FC 6 x 29Fi + IWRC
6 x 31WS + FC 6 x 31WS + IWRC
6 x 36WS + FC 6 x 36WS + IWRC




6x25Fi + FC




6x25Fi + IWRC




6x26WS + FC




6x26WS + IWRC



6x29Fi + FC




6x29Fi + IWRC




6x31WS + FC


Rope Dia. (mm)	Approx. Weight kg/100 m		Tensile Strength					
			1570 Mpa		1770 Mpa		1960 Mpa	
			Minimum breaking load (KN)					
Fibre Core	Steel Core	Fibre core	Steel core	Fibre core	Steel core	Fibre core	Steel core	
8	24.8	27.3	33.2	35.7	37.3	40.3	41.4	40.7
9	31.4	34.5	41.9	45.2	47.3	51.0	52.4	56.5
10	38.8	42.6	51.8	55.8	58.4	63.1	64.7	69.8
11	43.0	53.2	62.9	68.0	70.0	76.2	79.0	89.4
12	55.8	61.4	74.6	80.4	84.1	90.7	93.1	100
13	61.0	72.1	87.9	95.0	98.0	107	110	122
14	75.0	83.6	101	109	114	123	127	137
16	99.2	109	132	143	149	161	166	179
18	126	138	167	181	189	204	210	226
20	155	171	207	223	233	252	259	279
22	180	202	251	271	283	305	313	338
24	214	241	298	322	336	363	373	402
26	251	283	350	378	395	426	437	472
28	291	328	406	438	458	494	507	547
30	334	376	466	503	526	567	582	628
32	380	428	531	572	598	645	662	715
34	429	483	599	646	675	728	748	807
36	481	542	671	724	757	817	838	904
38	536	604	748	807	843	910	934	1010
40	594	669	829	894	935	1010	1030	1120
42	654	737	914	986	1030	1110	1140	1230
44	718	809	1000	1080	1130	1220	1250	1350
46	785	884	1100	1180	1240	1330	1370	1480
48	855	963	1190	1290	1350	1450	1490	1610
50	928	1040	1300	1400	1460	1580	1620	1740
52	1000	1130	1400	1510	1580	1700	1750	1890
54	1080	1220	1510	1630	1700	1840	1890	2030
56	1160	1310	1620	1750	1830	1980	2030	2190
58	1250	1410	1740	1880	1960	2120	2180	2350
60	1340	1500	1870	2010	2100	2270	2330	2510
62	1430	1610	1990	2150	2250	2420	2490	2680
64	1520	1710	2120	2290	2390	2580	2650	2860
66	1620	1820	2250	2430	2540	2740	2820	3040
68	1720	1930	2390	2580	2700	2910	2990	3230
70	1820	2050	2530	2730	2860	3080	3170	3420




6x36WS + FC



6x36WS + IWRC



6x31WS + IWRC

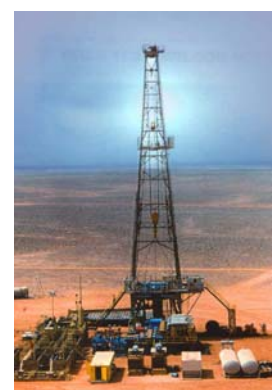


★ **ROUND STRANDED WIRE ROPE**


Used in crane machinery, lifting and salvage.



- Type : Round Stranded Wire rope
- Rope type : 8 x 19 (9/9/1)
- Rope Construction : 8 x 19S + FC 8 x 19S + IWRC



8x19S + FC



8x19S + IWRC




Rope Dia. (mm)	Approx. Weight kg/100 m		Tensile Strength					
			1570 Mpa		1770 Mpa		1960 Mpa	
			Minimum breaking load (KN)					
Fiber Core	Steel Core	Fiber core	Steel core	Fiber core	Steel core	Fiber core	Steel core	
10	35.3	43.0	46.0	54.3	51.8	61.2	57.4	67.8
11	42.7	52.1	55.6	65.7	62.7	74.1	69.5	82.0
12	50.9	62.0	66.2	78.2	74.6	88.1	82.7	97.6
13	59.7	72.7	77.7	91.8	87.8	103	97.1	115
16	90.5	110	117	139	132	156	147	173
18	108	137	149	176	168	198	186	220
20	133	169	184	217	207	245	230	271
22	162	204	223	263	251	296	278	328
24	192	243	265	313	299	353	331	391
26	226	285	311	367	351	414	388	458
28	262	331	361	426	407	480	450	532
30	300	380	414	489	467	551	517	610
32	342	432	471	556	531	627	588	694
34	386	488	532	628	600	708	664	784
36	432	547	596	704	672	794	744	879
38	482	609	664	784	749	884	829	979
40	534	675	736	869	830	980	919	1090
42	589	744	811	958	915	1080	1010	1200
44	646	817	891	1050	1000	1190	1110	1310
46	706	893	973	1150	1100	1300	1220	1430
48	769	972	1060	1250	1190	1410	1320	1560
50	834	1050	1150	1350	1290	1530	1440	1690




*** ROUND STRANDED WIRE ROPE**


- Type : Round Stranded Wire rope
- Rope type : 8 x 25 (12/6+6F/1) 8 x 31 (12+6/6+6+1)
8 x 36 (14/7&7/7/1) 8 x 41 (16/8&8/8/1)
- Rope Construction : 8 x 25Fi + FC 8 x 25Fi + IWRC
8 x 31WS + FC 8 x 31WS + IWRC
8 x 36WS + FC 8 x 36WS + IWRC
8 x 41WS + FC 8 x 41WS + IWRC




8x25Fi + FC




8x25Fi + IWRC




8x26WS + FC




8x26WS + IWRC




8x31WS + FC




8x31FWS + IWRC



8x36WS + FC



8x36WS + IWRC







8x41WS + IWRC

Rope Dia. (mm)	Approx. Weight kg/100 m		Tensile Strength					
			1570 Mpa		1770 Mpa		1960 Mpa	
			Minimum breaking load (KN)					
Fiber Core	Steel Core	Fiber core	Steel core	Fiber core	Steel core	Fiber core	Steel core	
14	71.4	87.0	90.1	106	101	120	113	133
16	93.2	110	117	139	132	156	147	173
18	118	144	149	176	168	198	186	220
20	146	177	184	217	207	244	230	271
22	176	215	222	262	251	296	278	328
24	210	256	264	312	298	352	331	390
26	233	294	310	367	350	413	388	458
28	270	341	360	425	406	480	450	531
*30	310	392	414	488	466	551	516	610
32	352	445	471	556	531	627	588	694
*34	398	503	531	627	599	707	663	783
36	446	564	596	704	672	793	744	878
*38	497	628	664	784	748	884	829	979
40	550	696	736	869	829	979	918	1080
*42	607	767	811	958	914	1080	1010	1190
44	666	842	890	1050	1000	1180	1110	1310
*46	728	920	973	1140	1090	1290	1210	1430
48	793	1000	1050	1250	1190	1410	1320	1560
*50	860	1090	1150	1350	1290	1530	1430	1690
52	930	1180	1240	1460	1400	1650	1550	1830
*54	1000	1270	1340	1580	1510	1780	1670	1970
56	1080	1360	1440	1700	1620	1920	1800	2120
*58	1160	1460	1540	1820	1740	2060	1930	2280
60	1240	1570	1650	1950	1860	2200	2060	2440
*62	1320	1670	1760	2080	1990	2350	2200	2600
64	1410	1780	1880	2220	2120	2500	2350	2700
*66	1500	1890	2000	2360	2250	2660	2500	2890
68	1590	2010	2120	2510	2390	2830	2650	3130
70	1690	2310	2250	2660	2540	3000	2810	3320
72	1780	2260	2380	2810	2680	3170	2970	3510
74	1880	2380	2510	2970	2830	3350	3140	3710
76	1990	2510	2650	3130	2990	3530	3310	3910
78	2090	2650	2790	3300	3150	3720	3490	4120
80	2200	2780	2940	3470	3310	3910	-	-
82	2310	2920	3090	3650	3480	4110	-	-
84	2430	3070	3240	3830	3650	4320	-	-

*** ROUND STRANDED WIRE ROPE**

Used for vertical shaft cage, cable way, port loading and loading and tower crane for building.

- Type : Round Stranded Wire rope
- Rope type : 18 x 7 (12x7 : 6x7)
- Rope Construction : 18 x 7 + FC 18 x 7 + WSC
 18 x 19S + FC 18 x 19S + WSC



18x7 + FC

18x7 + WSC

18x19S + FC

18x9S + WSC




Rope Dia. (mm)	Approx. Weight kg/100 m		Tensile Strength		
			1570 Mpa	1770 Mpa	1960 Mpa
	Fibre Core	Steel Core	Minimum breaking load (KN)		
8	25.00	27.50	32.90	37.10	41.10
9	31.60	34.80	41.70	47.00	52.10
10	39.00	43.00	51.40	58.00	64.30
11	47.20	52.00	62.30	70.20	77.80
12	56.20	61.90	74.10	83.60	92.60
13	65.90	72.70	87.00	98.10	108.00
14	76.40	84.30	100.00	113.00	126.00
16	99.80	110.00	131.00	148.00	165.00
18	126.00	139.00	167.00	188.00	208.00
20	156.00	172.00	206.00	232.00	257.00
22	189.00	208.00	249.00	281.00	311.00
24	225.00	248.00	297.00	334.00	370.00
26	264.00	291.00	348.00	392.00	435.00
28	306.00	337.00	404.00	455.00	504.00
30	351.00	387.00	463.00	523.00	579.00
32	399.00	440.00	527.00	594.00	658.00
34	451.00	497.00	595.00	671.00	743.00
36	505.00	557.00	667.00	752.00	833.00
38	563.00	621.00	744.00	838.00	928.00
40	624.00	688.00	824.00	929.00	1030.00
42	688.00	759.00	908.00	1020.00	1130.00
44	755.00	832.00	997.00	1120.00	1240.00
46	825.00	910.00	1090.00	1230.00	1360.00
48	899.00	991.00	1190.00	1340.00	1480.00
50	975.00	1080.00	1290.00	1450.00	1610.00
52	1050.00	1160.00	1390.00	1570.00	1740.00
54	1140.00	1250.00	1500.00	1690.00	1870.00
56	1220.00	1350.00	1610.00	1820.00	2020.00
58	1310.00	1450.00	1730.00	1950.00	2160.00
60	1400.00	1550.00	1850.00	2090.00	2310.00



*** ROUND STRANDED WIRE ROPE**

Steel strand twisted by round steel wire used for prestressed concrete structure, rock or earth anchorage, etc.

- Type : Round Stranded wire rope
- Rope type : Single Strand wire rope
- Rope Construction : 1 x 7



1 x 7



Rope Dia. (mm)	Approx. Weight kg/100 m	Tensile Strength		
		Minimum breaking load (KN)		
		1570 Mpa	1770 Mpa	1870 Mpa
1.8	1.69	2.74	3.09	3.27
2.1	2.30	3.73	4.21	4.45
2.4	3.01	4.88	5.50	5.81
2.7	3.80	6.18	6.96	7.36
3	4.70	7.63	8.60	9.08
3.3	5.69	9.23	10.40	10.90
3.6	6.76	10.90	12.30	13.00
3.9	7.94	12.80	14.50	15.30
4.2	9.21	14.90	16.80	17.80
4.5	10.57	17.10	19.30	20.40
4.8	12.03	19.50	22.00	23.20
5.1	13.58	22.00	24.80	26.20
5.4	15.22	24.70	27.80	29.40
6	18.79	30.50	34.40	36.30
6.6	22.74	36.90	41.60	43.90
7.2	27.06	43.90	49.50	52.30
7.8	31.76	51.50	58.10	61.40
8.4	36.83	59.80	67.40	71.20
9	42.29	68.60	77.40	81.70
9.6	48.11	78.10	88.00	93.00
10.5	57.55	93.40	105.00	111.00



Note: According to the requirements of customers, we can supply the products of other specifications.

