




SIRIUS safety relay safety-oriented Standstill monitoring 24 V DC, 45 mm screw terminal EC instantaneous: 3 NO + 1 NC EC delayed: 0 SC: 3 Auto-start Basic unit max. error category EN 954-1: 4 Maximum achievable PL according to EN 13849-1: Maximum achievable SIL according to IEC 61508: 3

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Standstill monitor
<b>design of the product</b>	for safe stoppage monitoring
<b>product type designation</b>	3TK28
<b>Product Function</b>	
<b>product function</b>	
<ul style="list-style-type: none"> <li>• automatic start</li> <li>• light barrier monitoring</li> <li>• standstill monitoring</li> <li>• protective door monitoring</li> <li>• magnetically operated switch monitoring NC-NO</li> <li>• magnetically operated switch monitoring NC-NC</li> <li>• rotation speed monitoring</li> <li>• laser scanner monitoring</li> <li>• light array monitoring</li> <li>• EMERGENCY OFF function</li> <li>• monitored start-up</li> <li>• pressure-sensitive mat monitoring</li> </ul>	<p>No</p> <p>No</p> <p>Yes</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p>
<b>suitability for interaction press control</b>	No
<b>suitability for use</b>	
<ul style="list-style-type: none"> <li>• position switch monitoring</li> <li>• EMERGENCY-OFF circuit monitoring</li> <li>• valve monitoring</li> <li>• opto-electronic protection device monitoring</li> <li>• tactile sensor monitoring</li> <li>• magnetically operated switch monitoring</li> <li>• proximity switch monitoring</li> <li>• safety switch</li> <li>• safety-related circuits</li> </ul>	<p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>Yes</p> <p>Yes</p>
<b>General technical data</b>	
certificate of suitability UL approval	Yes
<b>product feature cross-circuit-proof</b>	No
<b>insulation voltage rated value</b>	690 V
<b>surge voltage resistance rated value</b>	6 000 V
<b>protection class IP</b>	
<ul style="list-style-type: none"> <li>• of the enclosure</li> <li>• of the terminal</li> </ul>	<p>IP20</p> <p>IP20</p>
<b>shock resistance</b>	8g / 10 ms
<b>vibration resistance according to IEC 60068-2-6</b>	10 ... 55 Hz: 0.35 mm
<b>operating frequency maximum</b>	1 200 1/h

<b>mechanical service life (operating cycles) typical</b>	50 000 000
electrical endurance (operating cycles) typical	200 000
<b>thermal current of the switching element with contacts maximum</b>	5 A
<b>Substance Prohibittance (Date)</b>	05/01/2012
<b>Weight</b>	0.39 kg
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-40 ... +75 °C
relative humidity during operation	10 ... 95 %
air pressure according to SN 31205	90 ... 106 kPa
<b>Electromagnetic compatibility</b>	
<b>installation environment regarding EMC</b>	This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.
<b>EMC emitted interference</b>	IEC 61000-6-2, IEC 61000-6-3
<b>Safety related data</b>	
<b>stop category according to IEC 60204-1</b>	0
<b>average diagnostic coverage level (DCavg)</b>	99 %
IEC 62061	
SIL Claim Limit (subsystem) according to EN 62061	3
<b>Safety Integrity Level (SIL) according to IEC 62061</b>	SIL 3
PFHD with high demand rate according to IEC 62061	1.5E-9 1/h
ISO 13849	
category according to EN ISO 13849-1	4
<b>performance level (PL)</b>	
• according to ISO 13849-1	PL e
IEC 61508	
<b>Safety Integrity Level (SIL)</b>	
• according to IEC 61508	3
• for delayed release circuit according to IEC 61508	SIL3
<b>safety device type according to IEC 61508-2</b>	Type B
<b>Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508</b>	0.002 1/y
hardware fault tolerance according to IEC 61508	1
T1 value for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
<b>touch protection against electrical shock</b>	finger-safe
<b>adjustable response value voltage for standstill detection</b>	20 ... 400 mV
<b>adjustable downtime</b>	0.2 ... 6 s
<b>Short-circuit protection</b>	
design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	quick: 5 A
<b>Inputs</b>	
<b>design of input</b>	
• cascading input/functional switching	No
• feedback input	Yes
• start input	No
<b>number of sensor inputs</b>	
• 1-channel or 2-channel	1
<b>Outputs</b>	
<b>number of outputs as contact-affected switching element</b>	
• as NC contact	
— for signaling function instantaneous contact	2
• as NO contact	
— safety-related instantaneous contact	4
— safety-related delayed switching	0
<b>number of outputs as contact-less semiconductor switching element</b>	

<ul style="list-style-type: none"> <li>• for signaling function <ul style="list-style-type: none"> <li>— delayed switching</li> <li>— instantaneous contact</li> </ul> </li> <li>• safety-related <ul style="list-style-type: none"> <li>— delayed switching</li> <li>— instantaneous contact</li> </ul> </li> </ul>	0 2 0 0
<b>switching capacity current of semiconductor outputs</b>	
<ul style="list-style-type: none"> <li>• for signaling function at DC-13 at 24 V</li> </ul>	0.1 A
<b>switching capacity current of the NO contacts of the relay outputs at DC-13</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> </ul>	2 A
<b>switching capacity current of the NO contacts of the relay outputs at AC-15</b>	
<ul style="list-style-type: none"> <li>• at 115 V</li> <li>• at 230 V</li> </ul>	3 A 3 A
<b>switching capacity current of the NC contacts of the relay outputs at DC-13</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> </ul>	2 A
<b>switching capacity current of the NC contacts of the relay outputs at AC-15</b>	
<ul style="list-style-type: none"> <li>• at 115 V</li> <li>• at 230 V</li> </ul>	2 A 2 A
<b>voltage measuring range at the measurement inputs at AC according to UL maximum</b>	600 V
<b>voltage measuring range at the measurement inputs at AC maximum</b>	690 V
<b>adjustable response value voltage for standstill detection</b>	20 ... 400 mV
<b>input resistance at the measurement inputs</b>	500 kΩ
<b>Times</b>	
<b>adjustable OFF-delay time after opening of the safety circuits</b>	0.2 ... 6 s
adjustable downtime initial value	0.2 s
adjustable downtime full-scale value	6 s
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	DC
<b>control supply voltage 1 at DC rated value</b>	24 V
<b>operating range factor control supply voltage rated value of magnet coil at DC</b>	
<ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>	0.9 1.2
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	screw and snap-on mounting
<b>height</b>	138.5 mm
<b>width</b>	45 mm
<b>depth</b>	120 mm
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b>	screw terminal
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• for AWG cables solid</li> <li>• for AWG cables stranded</li> </ul>	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) 2x (20 ... 14) 2x (20 ... 14)
<b>connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> </ul>	0.5 ... 4 mm <sup>2</sup> 0.5 ... 2.5 mm <sup>2</sup>
<b>AWG number as coded connectable conductor cross section</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> </ul>	20 ... 14 20 ... 14
<b>type of electrical connection plug-in socket</b>	Yes
<b>Approvals Certificates</b>	
<b>General Product Approval</b>	



Functional Safety	Test Certificates	other	Railway	Environment
	<a href="#">Special Test Certificate</a>	<a href="#">Confirmation</a>	<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TK2810-0BA01>

##### Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK2810-0BA01>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TK2810-0BA01>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TK2810-0BA01&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TK2810-0BA01&lang=en)

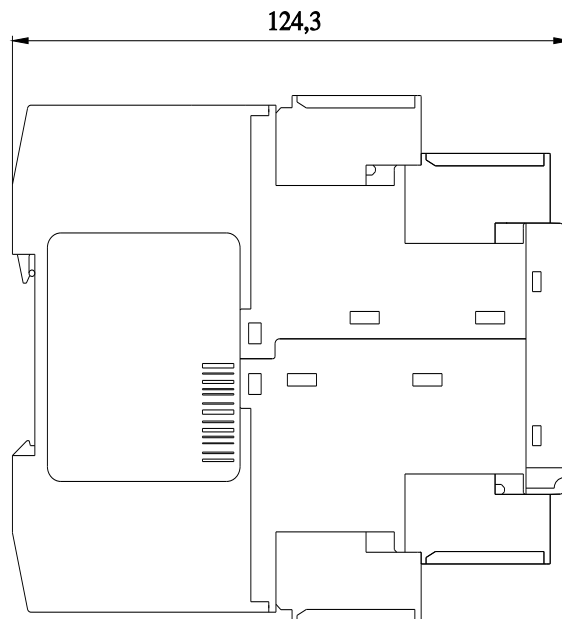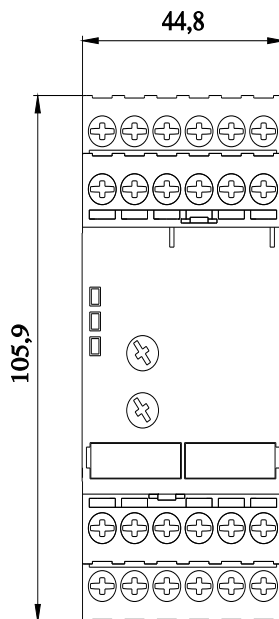

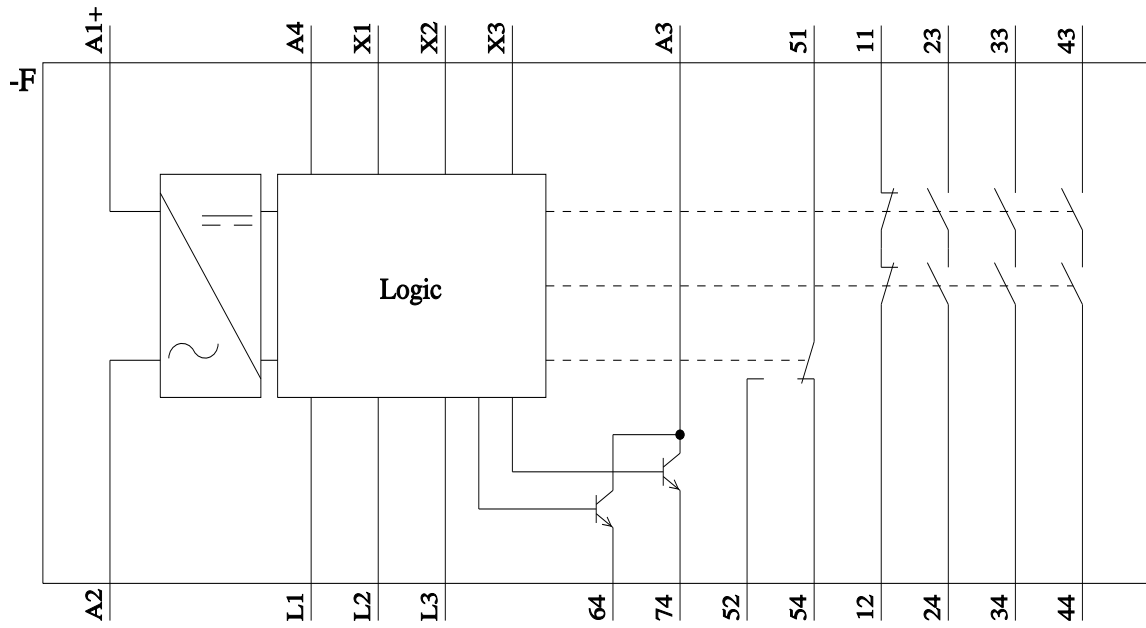

last modified:

11/25/2024 