

SKIRTING
REMASKIRT – Skirting rubber

REMASKIRT 50


High-quality skirting rubber made of natural rubber with high tensile strength. Excellent sealing properties particularly in connection with REMASLIDE impact bars.

Properties

- Low friction
- Easy fitment
- Available in thicknesses from 5 to 30 mm and belt widths from 100 to 2 000 mm
- Special qualities available on request
- Designed for temperatures from -40°C to +80°C

Area of application

- Skirting rubber and scraper for wet, sticky material

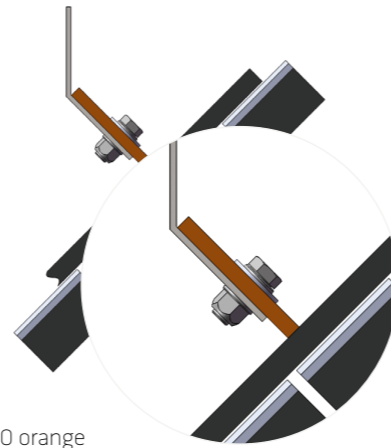

REMASKIRT 50 orange

REMASKIRT 50 orange

Specifications

| | | |
|-----------------|------------------------|-------------------|
| Polymer basis | NR | DIN ISO 1629 |
| Specific weight | 1.11 g/cm ³ | DIN EN ISO 1183-1 |
| Hardness | 51 Shore A | DIN ISO 7619-1 |
| Colour | Orange* | |

| Ref. No. | Designation | Dimensions |
|----------|--------------|------------------------|
| 550 1841 | REMASKIRT 50 | 5 x 2 000 x 10 000 mm |
| 549 6437 | REMASKIRT 50 | 6 x 2 000 x 10 000 mm |
| 550 1921 | REMASKIRT 50 | 7 x 150 x 10 000 mm |
| 550 1937 | REMASKIRT 50 | 7 x 2 000 x 10 000 mm |
| 549 6476 | REMASKIRT 50 | 8 x 120 x 10 000 mm |
| 549 6499 | REMASKIRT 50 | 8 x 2 000 x 10 000 mm |
| 549 6517 | REMASKIRT 50 | 10 x 100 x 10 000 mm |
| 549 6524 | REMASKIRT 50 | 10 x 120 x 10 000 mm |
| 549 6531 | REMASKIRT 50 | 10 x 150 x 10 000 mm |
| 549 6546 | REMASKIRT 50 | 10 x 200 x 10 000 mm |
| 549 6554 | REMASKIRT 50 | 10 x 2 000 x 10 000 mm |
| 549 6620 | REMASKIRT 50 | 12 x 200 x 10 000 mm |
| 549 6626 | REMASKIRT 50 | 12 x 2 000 x 10 000 mm |
| 549 6641 | REMASKIRT 50 | 15 x 150 x 10 000 mm |
| 549 6658 | REMASKIRT 50 | 15 x 200 x 10 000 mm |
| 549 6671 | REMASKIRT 50 | 15 x 2 000 x 10 000 mm |
| 549 6696 | REMASKIRT 50 | 20 x 150 x 10 000 mm |
| 549 6729 | REMASKIRT 50 | 20 x 2 000 x 10 000 mm |
| 549 6736 | REMASKIRT 50 | 25 x 2 000 x 10 000 mm |
| 549 6750 | REMASKIRT 50 | 30 x 2 000 x 10 000 mm |

*Please note that this is a product based on natural rubber and therefore deviations in color may occur.

SKIRTING
REMASKIRT – Skirting rubber

REMASKIRT COMBI SEAL



The REMASKIRT COMBI SEAL provides excellent sealing properties with its dual-seal rubber/polyurethane system and clamping mechanism. The REMASKIRT COMBI SEAL delivers excellent sealing properties particularly when used in connection with REMASLIDE impact bars. The Dual durometer rubber/polyurethane has exceptional tear resistance. The primary layer (65 Shore A) offers good low-abrasion characteristics while the secondary layer (50 Shore A) prevents dust and fines from escaping the system for optimum sealing.

Properties

- Optimum dual-sealing for high speed belts
- Dual-seal system in one-piece construction
- Easy, quick mounting and replacement
- Excellent low-abrasion characteristics
- Enhanced service life

Area of application

- Chute sealing system for conveyor system transfer point
- Suitable for fine-grained and dusty material
- Skirting rubber at Heavy-duty loading areas

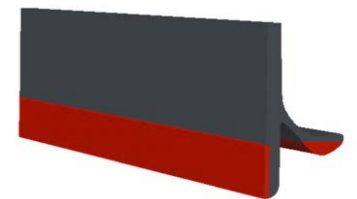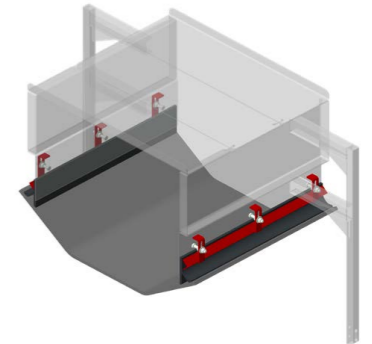

REMASKIRT COMBI SEAL

| Ref. No. | Designation | Dimensions |
|----------|----------------------|----------------------|
| 5495732 | REMA Combi-Seal PU | 12/4 x 150 x 15000mm |
| 5495735 | REMA Combi-Seal PU | 15/4 x 150 x 15000mm |
| 5495752 | REMA Combi-Seal PU | 15/4 x 200 x 15000mm |
| 5495755 | REMA Combi-Seal PU | 15/4 x 250 x 15000mm |
| 6495795 | REMA S-CLAMP (Steel) | 1000mm |