





6A – SAE Code 62 – Flange – Straight

ISO 12151-3-S-S – SFS – 6000 psi

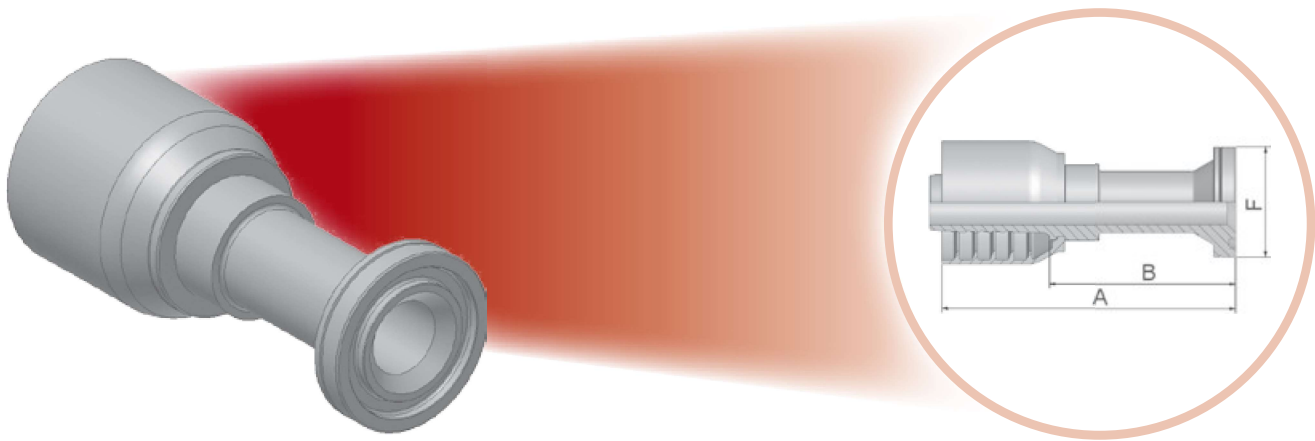

Approved fitting series for hose types:




XXXX·XX·XX Part Number 	 Hose I.D.				 End connection	A	B	F
	DN	Inch	Size	mm				
16A70-8-8	12	1/2	-8	12,7	1/2	103	68	32
16A70-8-10	16	5/8	-10	15,9	1/2	107	68	32
16A70-12-10	16	5/8	-10	15,9	3/4	117	78	41
16A70-8-12	20	3/4	-12	19,1	1/2	107	67	32
16A70-12-12	20	3/4	-12	19,1	3/4	105	66	41
16A70-16-12	20	3/4	-12	19,1	1	110	70	48
16A70-12-16	25	1	-16	25,4	3/4	127	82	41
16A70-16-16	25	1	-16	25,4	1	127	82	48
16A70-20-16	25	1	-16	25,4	1-1/4	127	82	54
16A70-20-20	32	1-1/4	-20	31,8	1-1/4	130	83	54
16A70-24-20	32	1-1/4	-20	31,8	1-1/2	131	84	64
16A70-24-24	40	1-1/2	-24	38,1	1-1/2	163	103	64

Find SAE flange halves in section Eb.
 Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.
 Find O-rings in section E. Special O-rings are available on request.
 Material: steel chromium(VI) free plated




6A – SAE Code 62 – Flange – Straight

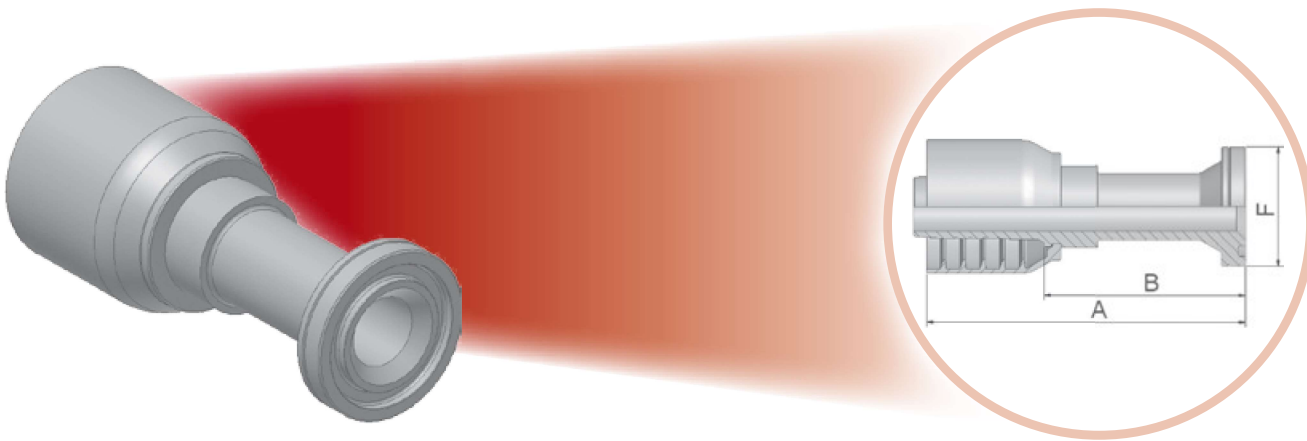ISO 12151-3-S-S – SFS – 6000 psi



Approved fitting series for hose types:




XXXX-XX-XX Part Number 	 Hose I.D.				 End Connection	A	B	F
	DN	Inch	Size	mm		mm	mm	mm
	16A71-8-8	12	1/2	-8	12,7	1/2	103	68
16A71-12-12	20	3/4	-12	19,1	3/4	105	66	41
16A71-16-12	20	3/4	-12	19,1	1	110	70	48
16A71-16-16	25	1	-16	25,4	1	127	82	48
16A71-20-16	25	1	-16	25,4	1-1/4	127	82	54
16A71-20-20	32	1-1/4	-20	31,8	1-1/4	130	83	54
16A71-24-20	32	1-1/4	-20	31,8	1-1/2	131	84	64
16A71-24-24	40	1-1/2	-24	38,1	1-1/2	163	107	64
16A71-32-32	50	2	-32	50,8	2	187	133	79

Find SAE flange halves in section Eb.
 Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.
 Find O-rings in section E. Special O-rings are available on request.
 Material: steel chromium(VI) free plated




6A – SAE Code 62 – Flange – Straight

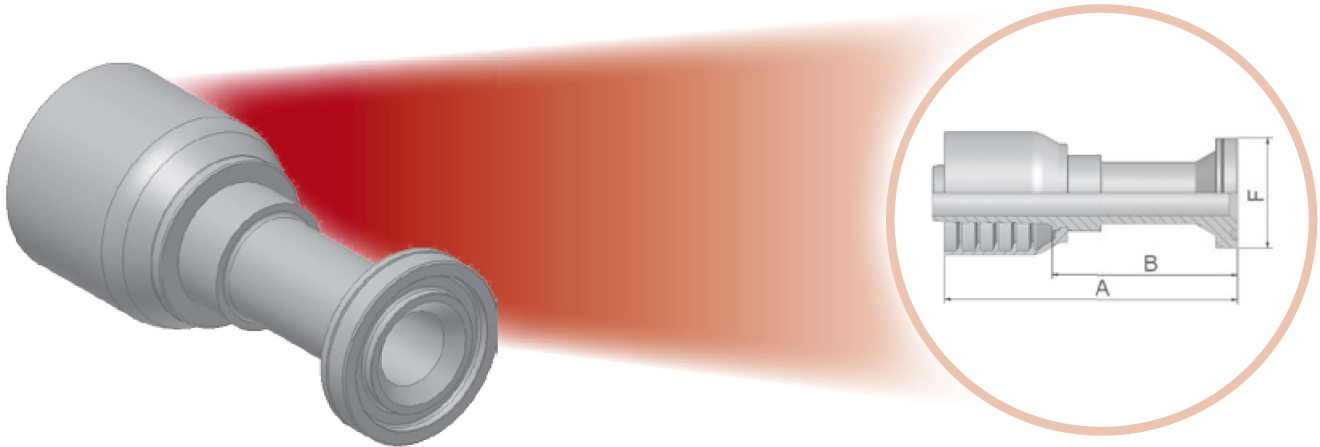ISO 12151-3-S-S – SFS – 6000 psi



Approved fitting series for hose types:




XXXX·XX·XX Part Number 	 Hose I.D.				 End Connection	A	B	F
	DN	Inch	Size	mm				
16A73-12-12	20	3/4	-12	19,1	3/4	130	82	41
16A73-16-12	20	3/4	-12	19,1	1	135	87	48
16A73-12-16	25	1	-16	25,4	3/4	136	85	41
16A73-16-16	25	1	-16	25,4	1	131	81	48
16A73-20-16	25	1	-16	25,4	1-1/4	142	91	54
16A73-16-20	32	1-1/4	-20	31,8	1	149	85	48
16A73-20-20	32	1-1/4	-20	31,8	1-1/4	149	85	54
16A73-24-20	32	1-1/4	-20	31,8	1-1/2	121	57	64
16A73-20-24	40	1-1/2	-24	38,1	1-1/4	158	96	54
16A73-24-24	40	1-1/2	-24	38,1	1-1/2	166	104	64
16A73-32-24	40	1-1/2	-24	38,1	2	129	66	79
16A73-32-32	50	2	-32	50,8	2	194	122	79

Find SAE flange halves in section Eb.
 Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.
 Find O-rings in section E. Special O-rings are available on request.
 Material: steel chromium(VI) free plated




6A – SAE Code 62 – Flange – Straight

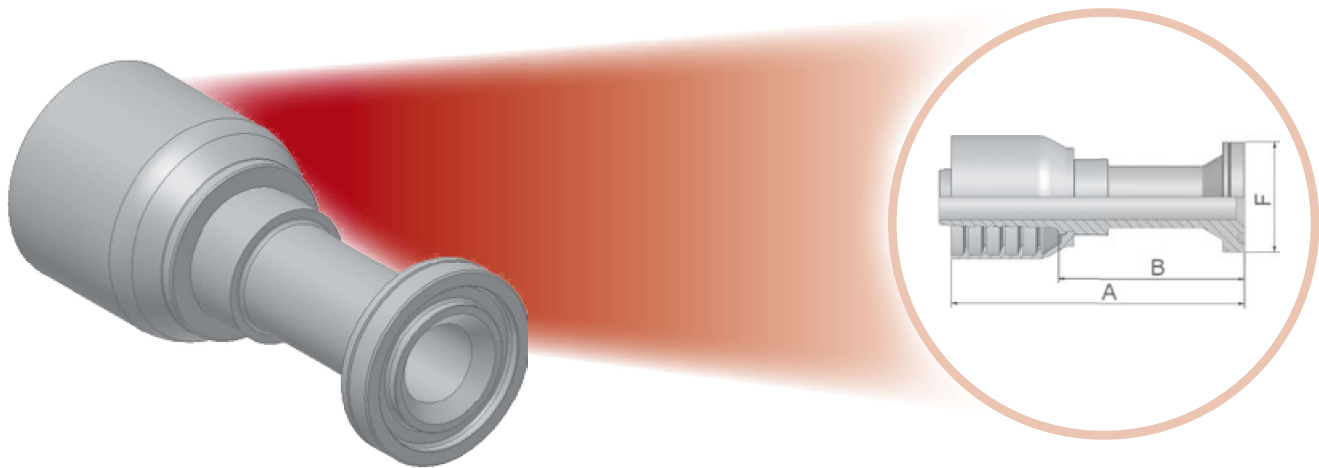ISO 12151-3-S-S – SFS – 6000 psi



Approved fitting series for hose types:



XXXX.XX.XX Part Number 	 Hose I.D.				 End Connection	A	B	F
	DN	Inch	Size	mm				
16A78-12-12	20	3/4	-12	19,1	3/4	130	82	41
16A78-16-12	20	3/4	-12	19,1	1	135	87	48
16A78-16-16	25	1	-16	25,4	1	131	81	48
16A78-20-16	25	1	-16	25,4	1-1/4	142	91	54
16A78-16-20	32	1-1/4	-20	31,8	1	149	85	48
16A78-20-20	32	1-1/4	-20	31,8	1-1/4	149	85	54
16A78-24-20	32	1-1/4	-20	31,8	1-1/2	121	57	64
16A78-20-24	40	1-1/2	-24	38,1	1-1/4	158	96	54
16A78-24-24	40	1-1/2	-24	38,1	1-1/2	166	104	64
16A78-32-24	40	1-1/2	-24	38,1	2	174	117	79

Find SAE flange halves in section Eb.


Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.

Find O-rings in section E. Special O-rings are available on request.

Material: steel chromium(VI) free plated




6A – SAE Code 62 – Flange – Straight

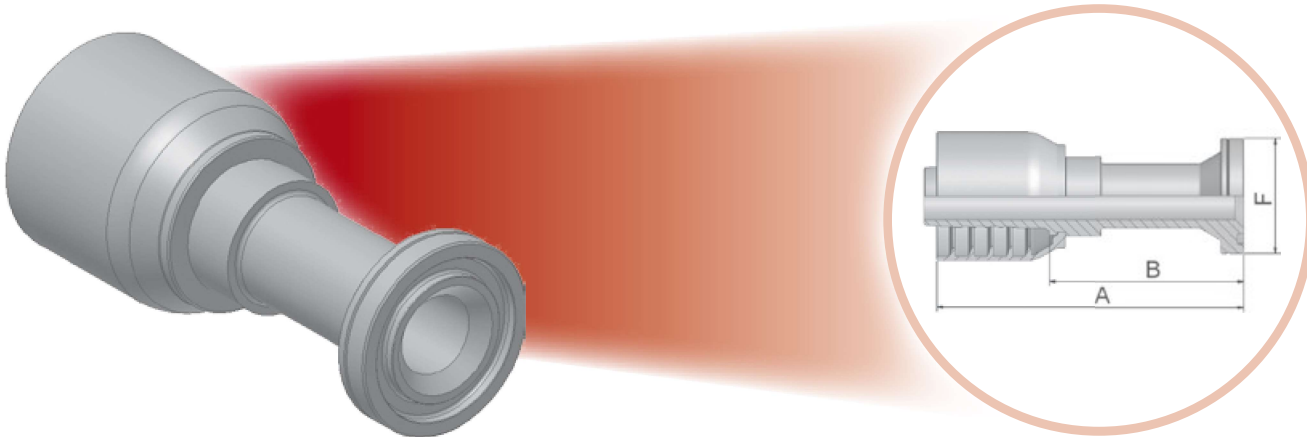ISO 12151-3-S-S – SFS – 6000 psi



Approved fitting series for hose types:




XXXX-XX-XX Part Number 	 Hose I.D.				 End Connection	A	B	F
	DN	Inch	Size	mm				
16A79-12-12	20	3/4	-12	19,1	3/4	124	72	41
16A79-16-12	20	3/4	-12	19,1	1	99	46	48
16A79-12-16	25	1	-16	25,4	3/4	132	73	41
16A79-16-16	25	1	-16	25,4	1	139	84	48
16A79-20-16	25	1	-16	25,4	1-1/4	109	50	54
16A79-16-20	32	1,1/4	-20	31,8	1	152	81	48
16A79-20-20	32	1-1/4	-20	31,8	1-1/4	158	87	54
16A79-24-20	32	1-1/4	-20	31,8	1-1/2	128	57	64
16A79-20-24	40	1-1/2	-24	38,1	1-1/4	165	87	54
16A79-24-24	40	1-1/2	-24	38,1	1-1/2	181	104	64

Find SAE flange halves in section Eb.
 Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.
 Find O-rings in section E. Special O-rings are available on request.
 Material: steel chromium(VI) free plated




6A - SAE Code 62 - Flange - Straight

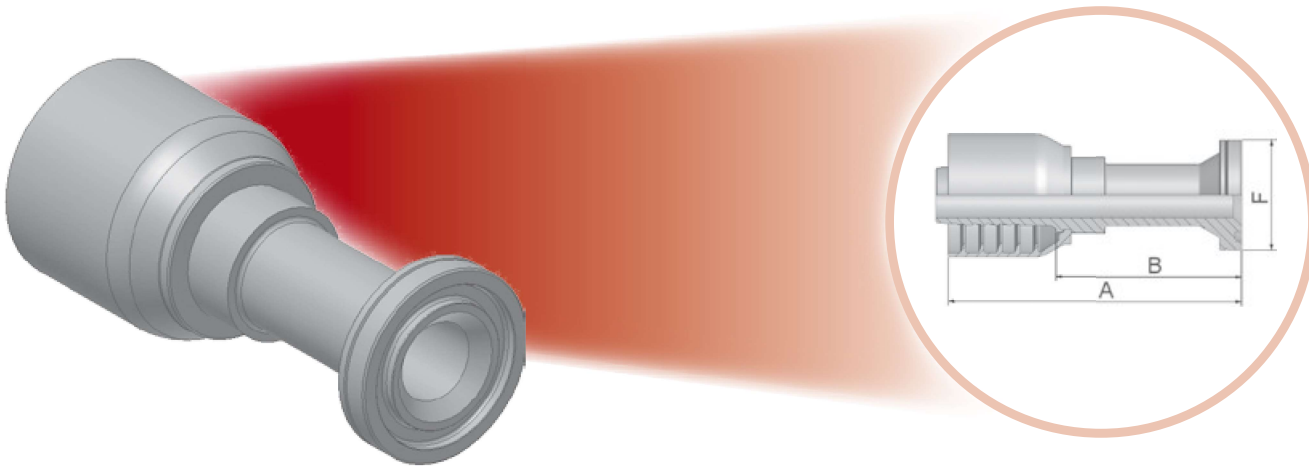ISO 12151-3-S-S – SFS – 6000 psi



Approved fitting series for hose types:



XXXX-XX-XX Part Number 	 Hose I.D.				 End Connection	A	B	F
	DN	Inch	Size	mm		mm	mm	mm
16AS6-32-32	50	2	-32	50,8	2	209	121	79

Find SAE flange halves in section Eb.
 Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.
 Find O-rings in section E. Special O-rings are available on request.
 Material: steel chromium(VI) free plated