


Manufactured models

Series name		CLK-J Series												CLK-H Series							
Frame		25JF2	15JFC	15JC	25J2	25J3	20J	26J	28J	35J3	35J	40J	50J	65J	65H	80H	100H	125H	150H	200H	250H
Terminal specification		Tab		Screw																	
Contact configuration	Main	2P	3P	3P	2P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P	3P
	Aux.	—	1NO (1NC)	—	—	1NO1NC (2NO,2NC)	—	1NO1NC (2NO2NC)	—	1NO1NC (2NO2NC)	2NO2NC										
Magnetic contactors	AC-operated model	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	DC-operated model	—	○	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Magnetic starters	AC-operated model	—	—	○	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	DC-operated model	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	Standard trip model	—	—	○	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	With 2-heaters thermal CLK-□T(C)	—	—	○	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	With phase-failure protection thermal CLK-□GT(C)	—	—	○	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	With 3-heaters thermal CLK-□T-3(C)	—	—	○	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Fast-trip model	—	—	○	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	With 2-heaters thermal CLK-□T-F(C)	—	—	○	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	With phase-failure protection thermal CLK-□GT-F(C)	—	—	○	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	With 3-heaters thermal CLK-□T-3F(C)	—	—	○	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Notes. ① ○ : Manufactures
② — : Non manufactures

Model explanation

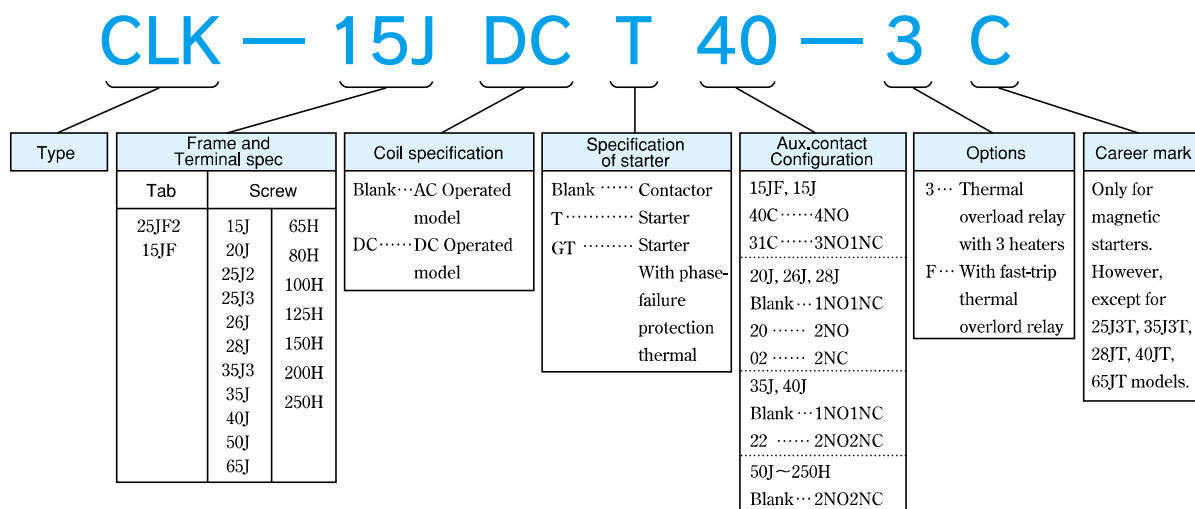

Note. ① CLK-15JF, 15J accompanies "C" at the end of model name.