


Specifications

1. Model : DP-5601
Platform : BW-302
Indicator : EDI-561
2. Weighing system : Strain gauze load cell
3. Weighing capacity : 3 kg to 2,000 kg
Platform dimension : Refer to "Capacity & Platform size" list
4. Display tube : 7-segmented 6 digit Fluorescent tube
Main display : 32H x 14.6W (mm)
Character size : 32H x 14.6W (mm)
5. Display contents : Weight Max. 5 digits
: Code 6 digits
: Date 6 digits
: Time 4 digits
: Tare Max. 5 digits
: Total weight 9 digits
: Total cycle (weight) 4 digits
6. Indication sign : Indicator ▼ lights within $0 \pm 1/4$ division
Center zero : Indicator ▼ lights at stable
Stable : Indicator ▼ lights in automatic mode
Automatic : Indicator ▼ lights when  key is pressed.
Shift : Indicator ▼ lights when  key is pressed.
Lamp indication : Red LED lights during tare subtraction
Net : Red LED lights during total being displayed
Total : Red LED lights during total being displayed
7. Keys

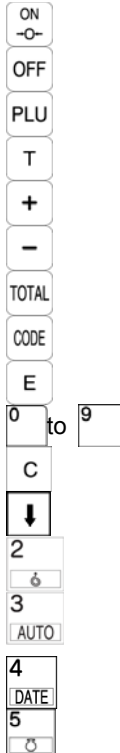

Turns on display or resets to zero.

Turns the power OFF.

Calls registered data, or registers data.

Performs the quick tare subtraction.

Addition or printout at addition.

Subtraction or printout at subtraction

Totalizing or total printout

To set code number.

Determines the setting value entered.

Enters a numerical value.

Clear data entry or tare

Change of function on keys 2-8

Feed the print paper (with  key) for JPS-508.

Changeover between automatic and manual (with  key).

To set date (with  key).

To set time (with  key).

- | | | | |
|-----|--|--|--|
| 8. | Tare setting | : 3 types | - One-touch by Tare key
- Numerical entry
- Recall by PLU number |
| 9. | Max. Tare
Recalling registered data | : up to capacity
Range | Within weighing capacity. |
| | | Registration method
Data to be registered | Individual or Multiple registration
Tare, Code No., Upper limit, Lower limit, Unit weight, Item name, Rank setting value, Rank name |
| 10. | Option | | |
| | a)Built-in journal printer | | |
| | Contents of print (each print) | | Weight (5 digit), Code (6 digit), Total cycle (4 digit), Date (6 digit), Time (4 digit) |
| | (Total print) | | Total weight (9 digit), Total number of weighing times (4 digit) |
| | b)RS232C interface | | |
| | Connectable device | : USB Memory, PC etc. | |
| | Output data | : Date, Code, Gross weight, Net weight, Tare, Total weight, Times of addition | |
| | Input data | : Addition command, Total command, Tare command, Zero reset command, Code, Date, Tare | |
| | c)Relay input/output | | |
| | Output | : 6 outputs available (Underweight, Pre-lower limit, Acceptable weight, Overweight, Rough feed, Fine feed) | |
| | Input | : Tare, Zero reset, Addition, Total | |
| | d)USB Memory | | |
| | e)Wireless communication | | |
| 11. | Power supply | : AC110V, 120V, 200V, 220V, 230V +10%~-15%, 50/60Hz | |
| 12. | Power consumption | : Approx. 23W | |
| 13. | Indicator | Material: Stainless Steel
IP rating: IP66 | |
| 14. | Operating condition | Temperature: -10°C to 40°C
Humidity: 30% to 85% RH (no condensation) | |
| 15. | Cable | Power cable: Approx. 4m
Load cell cable: | Approx. 3 meter (small & middle size)
Approx. 5 meter (large & extra-large size) |
| 16. | Accessory | Hook for hanging on walls | |


Outline view drawing

Capacity & Platform Size (Model: BW-302)


(Unit: mm)

Platform Size	Desk-top	Small	Medium	Ex-Medium	Large	Extra Large
Capacity (kg)	3 6 15	30 60 150	60 150 300	600	300 600 1200	1200 1500 2000
A	350	350	500	500	850	1200
B	300	500	750	750	1000	1200
C	80,+0~-10	112,+0~20	148,+0~20	236,+0~30	236,+0~50	246,+0~50
D	270	270	400	400	720	1070
E	305	495	660	660	855	1070
F	φ 38	φ 70	φ 70	φ 75	φ 75	φ 75
G (Pole type)	556,+0~10	903,+0~20	910,+0~20	935,+0~30	935,+0~50	nil
H (Pole type)	370	683	896	895	1145	nil


Separate Type (Standard)

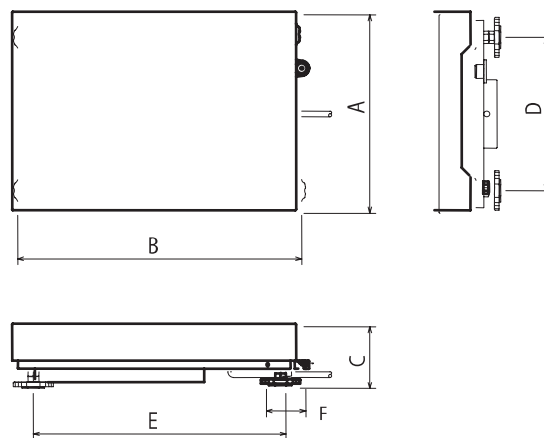


Integrated Pole Type

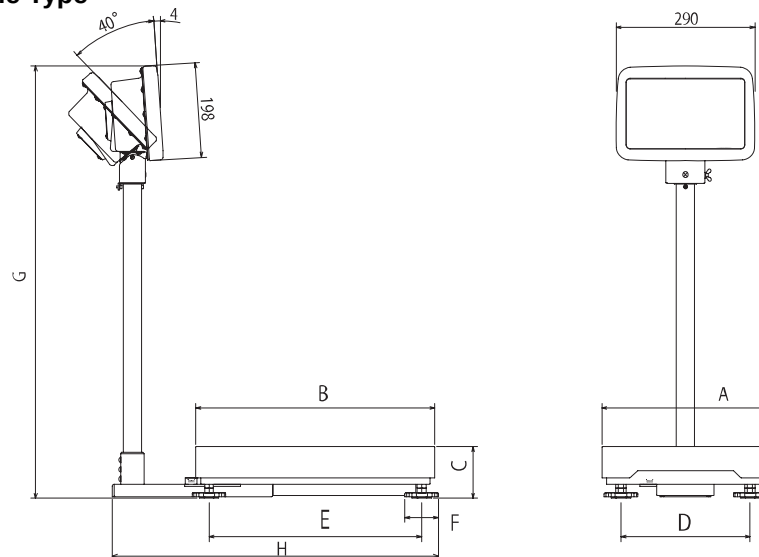

Desk-top Type

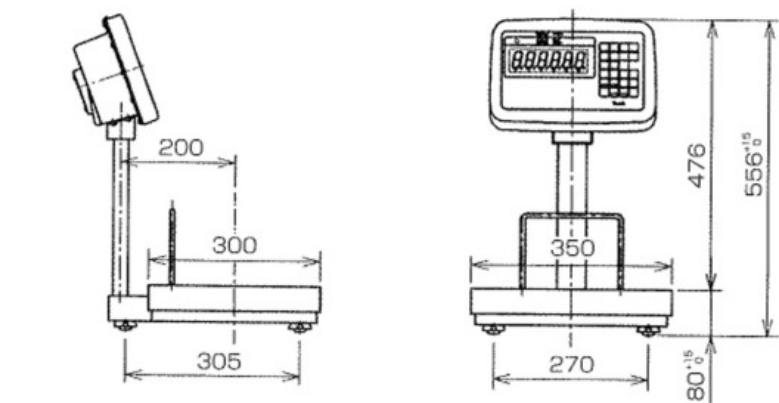

Separate Stand Type

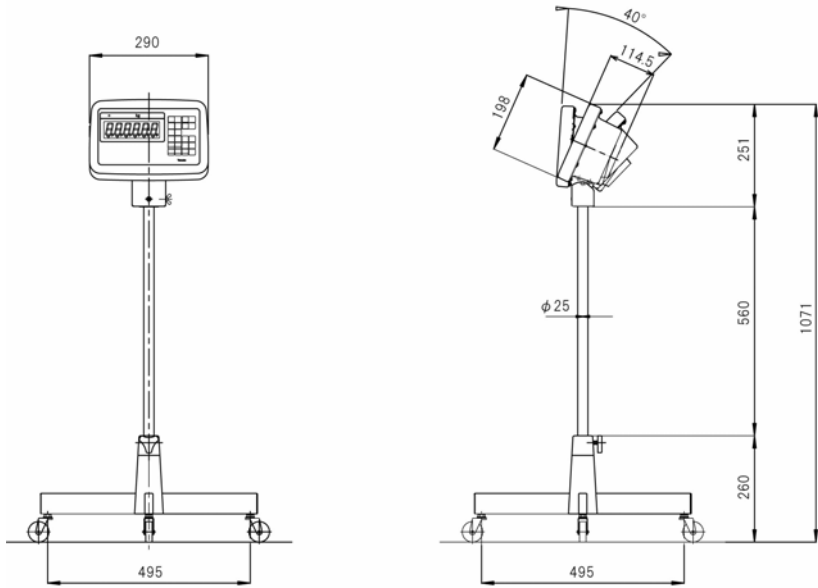

YAMATO SCALE CO., LTD.

5-22 Saenba-cho, Akashi 673-8688, Japan

Telephone: +81-78-918-6157

Telefax. +81-78-918-5562

PRINTED IN JAPAN