



Output coupling link Phased-out product !!! For further information, please contact our sales department Relay coupler, Screw terminals 1 change-over contact, 24 V AC/DC

General technical data		
protection class IP	IP20	
reference code according to IEC 81346-2	K	
Substance Prohibitance (Date)	07/01/2006	
Control circuit/ Control		
control supply voltage at AC		
• at 50 Hz rated value	24 ... 24 V	
• at 60 Hz rated value	24 ... 24 V	
control supply voltage at DC rated value	24 ... 24 V	
supply voltage frequency for auxiliary and control circuit rated value	50 ... 60 Hz	
design of the switching function	changeover switch	
Auxiliary circuit		
type of switching contact	single contact	
number of NC contacts for auxiliary contacts	0	
number of NO contacts for auxiliary contacts	0	
number of CO contacts for auxiliary contacts	1	
operational current of auxiliary contacts at AC-15		
• at 110 V	3 A	
• at 230 V	3 A	
operational current of auxiliary contacts at DC-13 at 230 V	0.1 A	
Main circuit		
type of voltage	AC/DC	
Connections/ Terminals		
type of electrical connection	screw terminal	
fastening method	snap-on mounting	
height	60 mm	
width	17.5 mm	
depth	62 mm	
ambient temperature during operation	-25 ... +60 °C	
Approvals Certificates		
General Product Approval	Test Certificates	other



[Type Test Certificates/Test Report](#)

[Miscellaneous](#)

[Confirmation](#)

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TX7002-1BB00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TX7002-1BB00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3TX7002-1BB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TX7002-1BB00&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3TX7002-1BB00/manual>

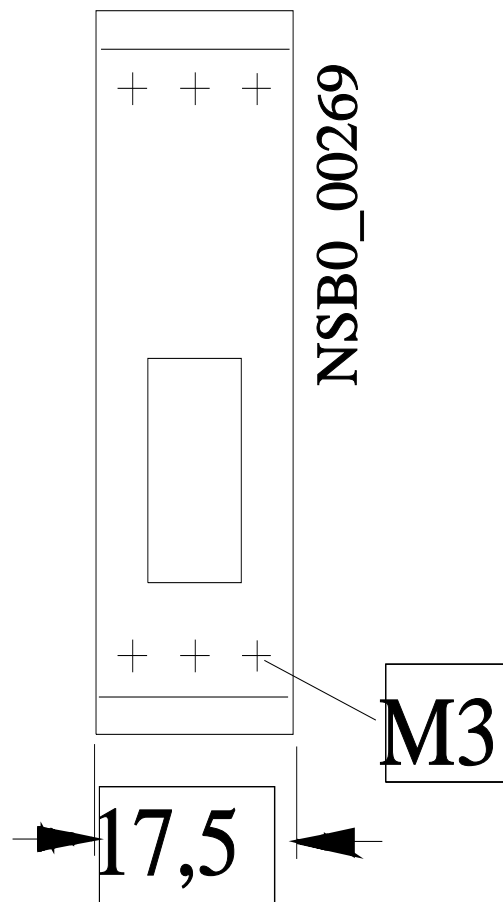

last modified:

4/8/2024