



**The Timken Company**

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • Web site: [www.timken.com](http://www.timken.com)

## Part Number 74550 - 74850, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

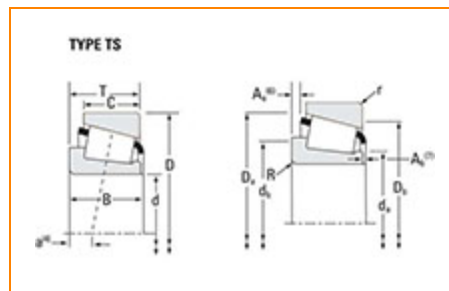

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

### Specifications

Series	74000
Cone Part Number	74550
Cup Part Number	74850
Design Units	Imperial
Bearing Weight	6 Kg 13.2 lb
Cage Type	Stamped Steel

### Dimensions

d - Bore	139.700 mm 5.5000 in
----------	-------------------------

<b>D - Cup Outer Diameter</b>	215.900 mm 8.5000 in
<b>B - Cone Width</b>	47.625 mm 1.875 in
<b>C - Cup Width</b>	34.925 mm 1.3750 in
<b>T - Bearing Width</b>	47.625 mm 1.8750 in

## Abutment and Fillet Dimensions

<b>R - Cone Backface "To Clear" Radius<sup>1</sup></b>	3.560 mm 0.14 in
<b>r - Cup Backface "To Clear" Radius<sup>2</sup></b>	3.3 mm 0.130 in
<b>da - Cone Frontface Backing Diameter</b>	150.88 mm 6.85 in
<b>db - Cone Backface Backing Diameter</b>	157.99 mm 6.22 in
<b>Da - Cup Frontface Backing Diameter</b>	209.00 mm 8.23 in
<b>Db - Cup Backface Backing Diameter</b>	196.09 mm 7.72 in
<b>Ab - Cage-Cone Frontface Clearance</b>	2.8 mm 0.11 in
<b>Aa - Cage-Cone Backface Clearance</b>	4.3 mm 0.17 in
<b>a - Effective Center Location<sup>3</sup></b>	2.3 mm 0.09 in

## Basic Load Ratings

<b>C90 - Dynamic Radial Rating (90 million revolutions)<sup>4</sup></b>	22300 lbf 99000 N
<b>C1 - Dynamic Radial Rating (1 million revolutions)<sup>5</sup></b>	85900 lbf 382000 N
<b>C0 - Static Radial Rating</b>	138000 lbf 614000 N
<b>C<sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions)<sup>6</sup></b>	18600 lbf 82600 N

## Factors

<b>K - Factor<sup>7</sup></b>	1.2
<b>e - ISO Factor<sup>8</sup></b>	0.49
<b>Y - ISO Factor<sup>9</sup></b>	1.23
<b>G1 - Heat Generation Factor (Roller-Raceway)</b>	363
<b>G2 - Heat Generation Factor (Rib-Roller End)</b>	63.3
<b>C<sub>g</sub> - Geometry Factor<sup>10</sup></b>	0.134

<sup>1</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>2</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>3</sup> Negative value indicates effective center inside cone backface.

<sup>4</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.

<sup>5</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.


<sup>6</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>7</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>8</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>9</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>10</sup> Geometry constant for Lubrication Life Adjustment Factor a3l.

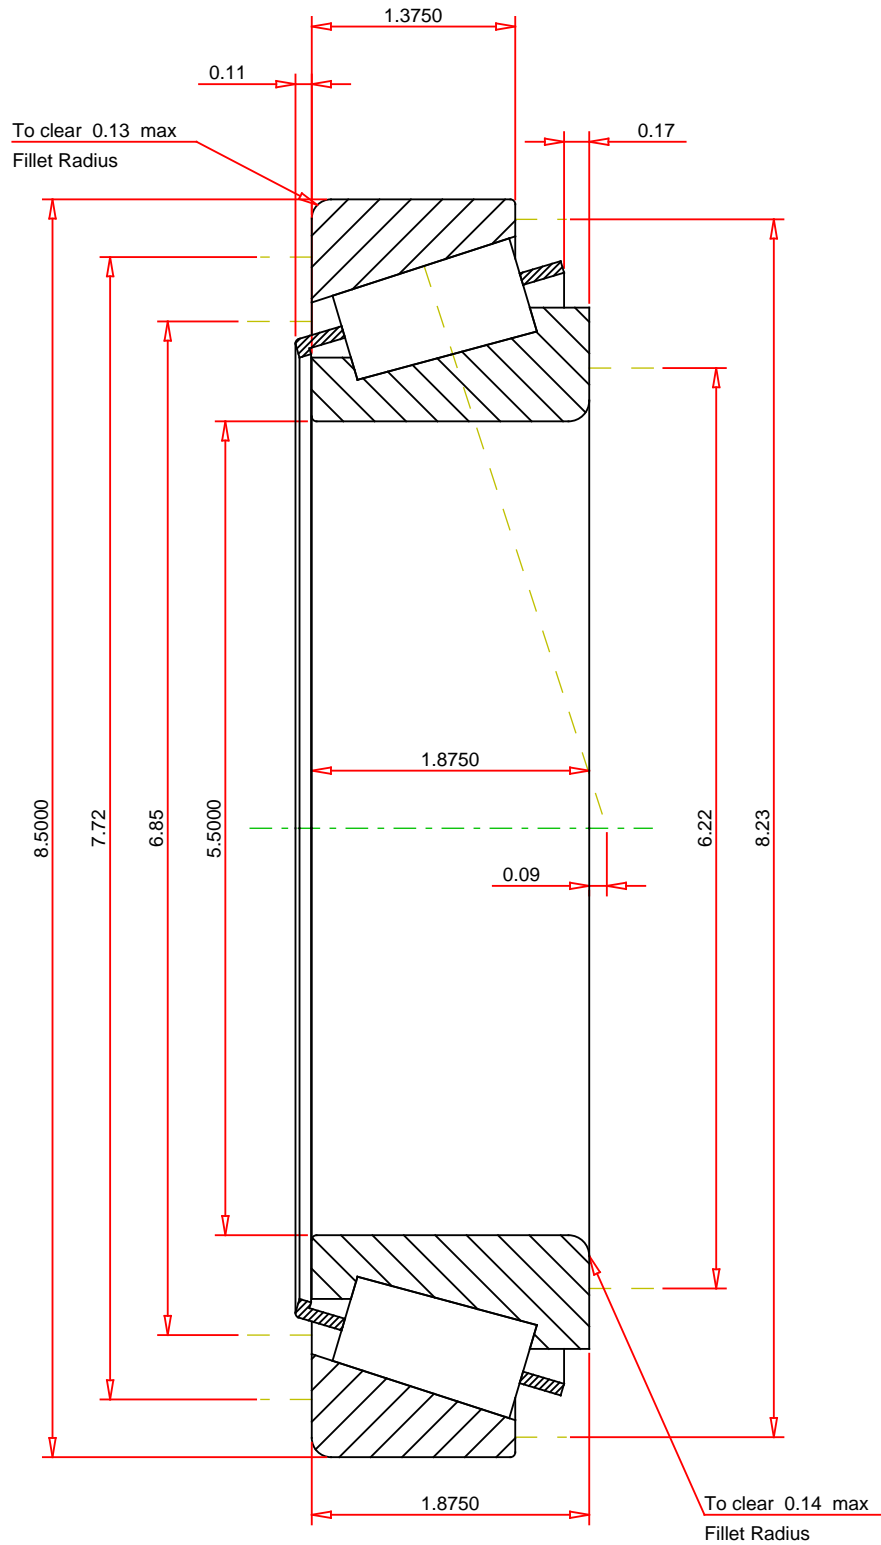

IMPERIAL UNITS

ISO Factor - e	0.49
ISO Factor - Y	1.23
Bearing Weight	13.2 lb
Number of Rollers Per Row	26
Effective Center Location	0.09 inch

**TIMKEN**®

**THE TIMKEN COMPANY**  
NORTH CANTON, OHIO USA

**74550 - 74850**  
TS BEARING ASSEMBLY

K Factor	1.2
Dynamic Radial Rating - C90	22300 lbf
Dynamic Thrust Rating - Ca90	18600 lbf
Static Radial Rating - C0	138000 lbf
Dynamic Radial Rating - C1	85900 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

**FOR DISCUSSION ONLY**