


Current Transformer

CT 205 - Split Core

IEC 60044-1

SPLN D3.014-1: 2009

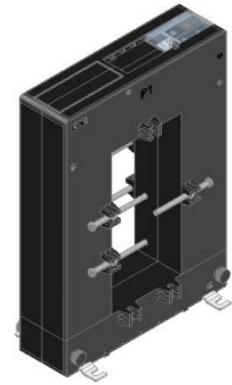


Specification

Highest voltage for equipment U_m (r.m.s.)	0.72 kV
Rated power-frequency withstand voltage (r.m.s.)	3 kV
Rated short-time thermal current (I _{th})	60 I _{pn}
Rated dynamic current (I _{dyn})	2.5 I _{th}
FS	5
Class of Insulation	E
Rated frequency	50 ... 60 Hz
Working temperature	0° ... 50° C
Storage temperature	-10° C ... +70° C
Relative humidity	95% (non condensing)
Case / Color	PC V0 / Black
Weight (approx.)	3,950 gr

Sales Package :

- Fastening screw (M5x60) + Nut M6 : 6 pcs
- Mounting clad : 4 pcs
- QC sheet : 1 pcs

Dimension (mm)

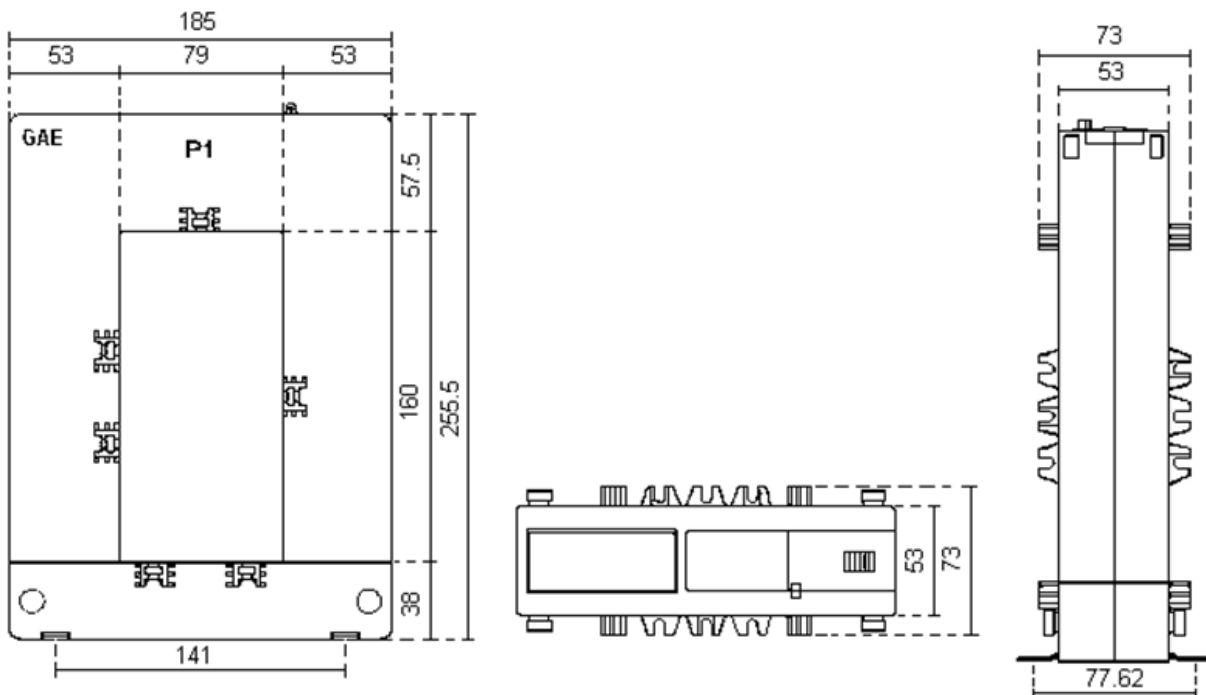

Ordering Code

Rated Current Ipn/Isn	Class 1		Class 0.5		Class 0.5S	
	Rated Output (VA)	Ordering Code	Rated Output (VA)	Ordering Code	Rated Output (VA)	Ordering Code
750/5A	7.5	20902	3.75	20901	2.5	20900
800/5A	10	20906	5	20905	3.75	20904
1000/5A	20	2090A	10	20909	5	20908
1200/5A	20	2090E	10	2090D	7.5	2090C
1250/5A	30	2090I	15	2090H	10	2090G
1500/5A	40	2090M	20	2090L	15	2090K
1600/5A	50	2090Q	30	2090P	20	20900
2000/5A	60	2090U	40	2090T	30	2090S
2500/5A	60	2090Y	50	2090X	40	2090W
3000/5A	60	20912	60	20911	50	20910
3200/5A	60	2091E	60	2091D	50	2091C
4000/5A	60	20916	60	20915	60	20914
5000/5A	60	2091A	60	20919	60	20918
6000/5A	60	2091H	60	2091G	60	2091F