

PSF STEEL ★★☆☆☆

Cut-off wheel for steel with high cutting performance and long tool life.

Advantages:

- Fast work progress thanks to high cutting performance.
- High economic efficiency due to long tool life.

Materials that can be worked:

steel

Applications:

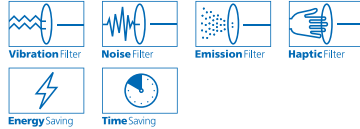
cutting of sheet metal, profiles and solid material, cutting out holes




Abrasive:

Aluminium oxide A

PFERDVALUE:

Thin cut-off wheels:



D [mm]	T/U [mm]	EAN 4007220	H [mm]	Max. RPM		Description
Flat type EHT (shape 41) 						
100	2.4	321256	16.0	15,300	25	EHT 100-2,4 PSF STEEL/16,0
105	1.0	N! 976135	16.0	14,500	25	EHT 105-1,0 PSF STEEL/16,0
115	1.0	560242	22.23	13,300	25	EHT 115-1,0 PSF STEEL
	1.6	➤ 538111	22.23	13,300	25	EHT 115-1,6 PSF STEEL
	2.4	669174	22.23	13,300	25	EHT 115-2,4 PSF STEEL
125	1.0	➤ 560259	22.23	12,200	25	EHT 125-1,0 PSF STEEL
	1.6	➤ 538128	22.23	12,200	25	EHT 125-1,6 PSF STEEL
	2.4	669167	22.23	12,200	25	EHT 125-2,4 PSF STEEL
150	1.6	➤ 953341	22.23	10,200	25	EHT 150-1,6 PSF STEEL
180	1.6	581209	22.23	8,500	25	EHT 180-1,6 PSF STEEL
	3.0	163474	22.23	8,500	25	EHT 180-3,0 PSF STEEL
230	1.9	581339	22.23	6,600	25	EHT 230-1,9 PSF STEEL
	3.0	163498	22.23	6,600	25	EHT 230-3,0 PSF STEEL
Depressed-centre type EH (shape 42) 						
100	2.4	163511	16.0	15,300	25	EH 100-2,4 PSF STEEL/16,0
115	2.4	163528	22.23	13,300	25	EH 115-2,4 PSF STEEL
	3.2	522998	22.23	13,300	25	EH 115-3,2 PSF STEEL
125	2.4	163429	22.23	12,200	25	EH 125-2,4 PSF STEEL
	3.2	523001	22.23	12,200	25	EH 125-3,2 PSF STEEL
180	3.0	163436	22.23	8,500	25	EH 180-3,0 PSF STEEL
230	3.0	163450	22.23	6,600	25	EH 230-3,0 PSF STEEL

N! New in 2018

➤ Performance upgrade 2018

