



Branch Tees

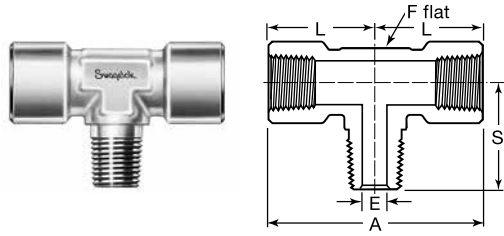

Male and Female NPT

NPT Size in.	Basic Ordering Number	Dimensions, in. (mm)					Pressure Ratings psig (bar)				
		A	E	L	S	F	316 SS, Carbon Steel	Brass	Alloy 2507, Alloy 625	6-Moly	Alloy 825
1/8	-2-BT	2.08 (52.8)	0.19 (4.8)	1.04 (26.4)	0.87 (22.1)	1/2	6 500 (447)	3 200 (220)	12 500 (861)	8 800 (606)	7 500 (516)
1/4	-4-BT	2.34 (59.4)	0.28 (7.1)	1.17 (29.7)	1.17 (29.7)	11/16	7 200 (496)	3 600 (248)	13 900 (957)	9 700 (668)	8 300 (571)
3/8	-6-BT	2.84 (72.1)	0.38 (9.6)	1.42 (36.1)	1.26 (32.0)	13/16	5 600 (385)	2 800 (192)	10 800 (744)	7 500 (516)	6 500 (447)
1/2	-8-BT	3.12 (79.2)	0.47 (11.9)	1.56 (39.6)	1.56 (39.6)	1	5 600 (385)	2 800 (192)	10 800 (744)	7 500 (516)	6 500 (447)

Street Tees

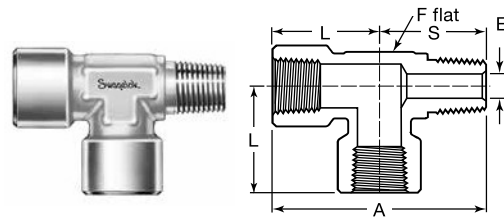

Male and Female NPT

NPT Size in.	Basic Ordering Number	Dimensions, in. (mm)					Pressure Ratings psig (bar)				
		A	E	L	S	F	316 SS, Carbon Steel	Brass	Alloy 2507, Alloy 625	6-Moly	Alloy 825
1/8	-2-ST	1.91 (48.5)	0.19 (4.8)	1.04 (26.4)	0.87 (22.1)	1/2	6 500 (447)	3 200 (220)	12 500 (861)	8 800 (606)	7 500 (516)
1/4	-4-ST	2.34 (59.4)	0.28 (7.1)	1.17 (29.7)	1.17 (29.7)	11/16	7 200 (496)	3 600 (248)	13 900 (957)	9 700 (668)	8 300 (571)
3/8	-6-ST	2.68 (68.1)	0.38 (9.6)	1.42 (36.1)	1.26 (32.0)	13/16	5 600 (385)	2 800 (192)	10 800 (744)	7 500 (516)	6 500 (447)
1/2	-8-ST	3.12 (79.2)	0.47 (11.9)	1.56 (39.6)	1.56 (39.6)	1	5 600 (385)	2 800 (192)	10 800 (744)	7 500 (516)	6 500 (447)
3/4	-12-ST	3.59 (91.2)	0.62 (15.7)	1.92 (48.8)	1.67 (42.4)	1 1/4	5 100 (351)	2 500 (172)	9 800 (675)	6 900 (475)	5 900 (406)